



BOSCH

PROFESSIONAL POWER TOOLS CATALOGUE Q3-Q4.2024

Scan e-Catalogue





BOSCH



PARTS & LABOR INCLUDED
T&C apply.

**ON ALL POWER TOOLS
AND MEASURING TOOLS**

REGISTER YOUR TOOLS FOR E-WARRANTY

1 DOWNLOAD

The BeConnected App

2 REGISTER


Your Tools

3 UPLOAD

Proof of Purchase



BeConnected

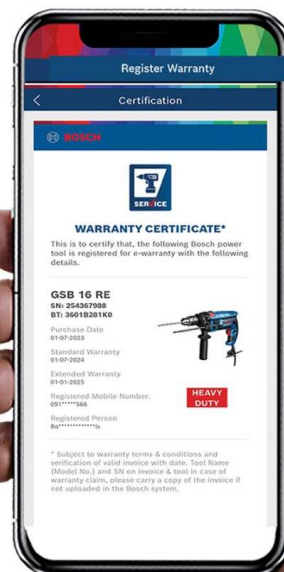

BOSCH AUTHORIZED SERVICE CENTERS

METRO MANILA: ALTSTAR ENTERPRISES 1054 Reina Regente cor Recto Ave., Binondo Manila 1006 T: +63 917 8305576 E: howelltansy@gmail.com | **KUMPONI MASTER INC.** 20-A D. Tuazon corner Luskot St. Don Manuel, Quezon City 1113 T: +63 2 72553932 M: +63 9270784408 / +63 9171736636 E: kumponimaster@gmail.com | **AYOS MAESTRO CORP.** G/F WC Bldg., 2438 Belarmino St., Brgy. Bangkal, Makati City 1233 T: +63 2 77387406 / 8401934 M: +63 9171032451 E: ayosmaestro@gmail.com

SOUTH LUZON: MALIBANGA ENTERPRISES 346-C Alabang Zapote Road, Talon Uno Las Pinas City 1700 T: +63 2 88336214 M: +63 920 902 7475 E: malibanga_ent@yahoo.com | **CHARLESTON COMPUTER EXPRESS CENTER** 476 Rizal Avenue corner P. Genato St. Brgy 21, Batangas City 4200 T: +63 43 9802169 E: charlestonpcworx@gmail.com | **OLIVAN HARDWARE DEPOT INC.** Behind Olivian Sea Oil Station, Magsaysay Avenue, Naga City 4400 T: +63 54 472 2828 E: olivanhomedepotsales@gmail.com | **NEW DARAGA DY ENTERPRISES INC.** Rizal St. Daraga Albay 4501 T: +63 52 483 3613 / 483 3813 E: jen_sy_dy@yahoo.com

NORTH WEST LUZON: DAU-AGRI IND'L CORP. Dau Access Road Nlex, Highway, Dau Mabalacat City, Pampanga 2010 T: +63 45 458 2941 E: dauagrii@gmail.com | **D.L. ELECTRONICS SERVICE CENTER** Coastway Complex, Arellano Bani Dagupan City 2400 M: +63 9457304673 E: dlbuguio@yahoo.com | **D.L. ELECTRONICS SERVICE CENTER** #65 Decidar Bldg. Lower Bonifacio St. Baguio, Benguet 2600 T: +63 746619438 E: boschbaguiohub@gmail.com

NORTH EAST LUZON: DGS AIRCONDITIONING TRADING Brgy Zulueta, Maharlika Highway Cabanatuan City, Nueva Ecija 3100 T: +63 448061841 E: dgsaircontrading@gmail.com | **GOMEZ POWER TOOLS SALES & SERVICE CENTER** Rizal, Santiago City, Isabela, Region 2, Cagayan Valley 3311 T: +63 7883955266 E: gomezpowertools@gmail.com | **CONSUMER APPLIANCE SERVICE CENTER** National Highway, Purok 2, Bonfal proper Bayombong, Nueva Vizcaya 3700 T: +63 78 8051880 M: +63 9175644800 E: conserv_2006@yahoo.com

VISAYAS: TOOLAID SERVICE CENTER Unit 2 & 3 Maroo Arcade Mantawi Drive William Seno St. Mandaue City 6014 T: +63 32 414 7909 M: +63 9693153888 E: support-mde@toolaid.ph | **TOOLAID SERVICE CENTER** Unit D, Arcenas Bldg., MJ Cuenco Ave. Brgy T. Padilla, Cebu City 6000 T: +63 324273375 M: +63 9693153888 / +63 9693163888 E: support-cbu@toolaid.ph | **BACOLOD INTEGRAL INC.** JL Bldg Luzuriaga St. Brgy 31, Bacolod City 6100 T: +63 344338170 / 4766561 / 434 2303 E: bacolodintegral@yahoo.com | **NIPPON ENGINEERING WORKS** Ledesma corner Mabini St. Ilo Ilo City 5000 T: +63 333373232 / 5081869 / 3371122 E: nipponengineeringworks@gmail.com | **FAR EASTERN HARDWARE & FURNITURE** 38 Quezon St. Ilo Ilo City 5000 T: +63333373808 E: feh_qzn@yahoo.com / sales@fareastern.com.ph | **REJOICE HARDWARE & ELECT'L SUPPLY** 166 Hermie Bldg Cervantes St. Dumaguete City 6200 T: +63 354226762 / 2254685 / 2251836 E: rejoice_hardware@yahoo.com | **WASHINGTON ENTERPRISES** 181-185 Rizal Ave., Tacloban City 6500 T: +63 533212521 E: wephl@yahoo.com / washington.enterprises.service@gmail.com

SOUTH MINDANAO: DMD Electronics JVS Peak Bldg., Door 2 & 3 Roxas Blvd., Davao City 8000 T: +63 822843114 E: dmd_electronics@yahoo.com | **N&N SERVICE CENTER** MCLL Hi-way (formerly Tetuan Hi-way) Zamboanga City, 7016 T: +63 62 993 2190 M: +63 917 710 6193 E: nnservicecenter.c@gmail.com

NORTH MINDANAO: AC POWERTOOLS TRADING #583 Jr. Borja Extension Camaman-an, Cagayan De Oro City 9000 M: +63 9664196636 E: acpowertools2023@gmail.com | **FLERIC'S APPLIANCE SERVICE CENTER** B- Pilar Bldg., Port Area, Sabayle, Poblacion, Iligan City, 9200 Lanao Del Norte M: +63 968 615 3197

ROBERT BOSCH INC. 11/F West Campus, 20 Le Grand Ave., Mckinley West, Fort Bonifacio, 1634 Taguig City T: +63 2 88703888 | www.bosch-pt.com.ph

BOSCH CEBU HUB, Unit 2 & 3 Maroo Arcade, Mantawi Drive, William Seno St., Cebu City 6014 T: +63 32 4147909 | E: toolaidservicecentermde@yahoo.com

BOSCH DAVAO HUB, Door 2 & 3 JV'S Peak Bldg., Roxas Blvd., Davao City 8000 T: +63 82 2843114 | E: dmd_electronics@yahoo.com

FIND US ONLINE!

Follow our social media accounts to keep up with the latest news about Bosch Power Tools. Don't hesitate to contact us via these channels if you need any help or support.

**Bosch Professional Power Tools
and Accessories**



**Bosch Professional
Philippines**



www.bosch-pt.com.ph



Info.BoschPT@ph.bosch.com



e-NEWSLETTER

Subscribe to our e-newsletter and be the first to receive exclusive offers and promotions.



BOSCH PT WEBSITE

Visit Bosch Power Tools Philippines Website for updates.



DEALER LOCATOR

Find the Bosch authorized dealer near you.



SHOP ONLINE

Bosch Power Tools are available online at our Flagship store and authorized online dealers.






THE ONE STOP SOLUTION FOR YOUR BOSCH POWER TOOLS

What is BeConnected App?

BeConnected is your free, convenient and efficient digital app for numerous services from Bosch Professional Power Tools. Register once, and continuously benefit from all current and future services. Read on to discover how to enjoy a better digital lifestyle with Bosch BeConnected and download the app today!

BeConnected App Features

-  Discount coupons
-  Dealer and Service Center Locator
-  Product Catalogue & Reviews
-  Invite Bosch users by sharing a link to download
-  Product Authenticity Check
-  E - Warranty Registration
-  Earn points and redeem gifts
-  Latest promotions & hot deals

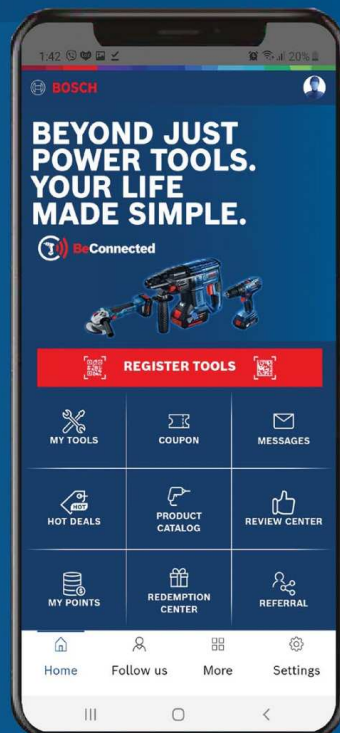

PLUS! GET 18 MONTHS WARRANTY

on **HEAVY DUTY TOOLS**

HEAVY DUTY

JANUARY 1 - DECEMBER 31, 2024

Terms and conditions apply.

HOW TO REGISTER YOUR TOOLS

STEP 1

Download the app



or

SCAN TO DOWNLOAD



STEP 2



Register or
login with
your Bosch ID

STEP 3



Register your tools

1. Upload valid invoice
2. Upload photo of the tool nameplate

STEP 4



Secure E-warranty
Certificate



Contractor's Choice Range

QUALITY MADE AFFORDABLE.

Small Angle Grinder

GWS 700



Specifications

Rated input power	710 W
Voltage	220 - 240 V
No-load speed	12,000 rpm
Disc diameter	100 mm
Grinding spindle thread	M10
Weight	1.6 kg

Cordless Drill Driver

GSR 120-LI (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling Dia.:	
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

Cordless Impact Drill

GSB 120-LI (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling Dia.:	
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

GSB 183-LI (Kit Set)



Specifications

Battery Voltage	18V / 2.0 Ah
Max. Torque (hard/soft)	56 / 21 Nm
No-load Speed	0-440 / 1,650 rpm
Max. Drilling Dia.:	
-In Wood	35 mm
-In Metal	10 mm
-In Masonry	10 mm
Chuck type	Metal
Weight	1.6 kg

Cordless Impact Driver

GDR 120-LI (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Max. Torque Hard	100 Nm
No-load speed	0 - 1,300/ 2,600 rpm
Impact rate	2,800 - 3,200 rpm
Max. Screw Dia.	8 mm
Bit Holder	1/4"
Weight	1.05 kg

Drill

GBM 400



Specifications

No-load speed	0- 2,800 rpm
Rated input power	400 W
Weight	1.283 kg
Power output	180 W
Chuck capacity, min./max.	10 mm

Impact Drill

GSB 600



Specifications

Power Input	600 W
No-load Speed	0 - 3,000 rpm
Impact rate	0 - 48,000 bpm
Drilling in wood	25 mm
Drilling in concrete	13 mm
Drilling in Steel	10 mm
Chuck capacity	13 mm
Drilling in Masonry	13 mm
Weight	1.7 kg

Rotary Hammer

GBH 220



Specifications

Impact Energy	2 J
Power	720 W
No-load speed	0-2,000 rpm
Max. drilling concrete	22 mm
Mode	3 modes
Weight	2.3 kg

Demolition Hammer

GSH 500



Specifications

Power Input	1,100 W
Impact Energy - EPTA Value	7.8 J
Impact Rate	2,900 bpm
Tool holder	Hex
Auxiliary Handle	Straight Handle
Weight	5.6 kg

GSH 500 MAX



Specifications

Power Input	1,100 W
Impact Energy - EPTA Value	7.8 J
Impact Rate	2,900 bpm
Tool holder	SDS-Max w/ vario lock
Auxiliary Handle	Straight Handle
Weight	5.7 kg

Marble Cutter

GDC 140



Specifications

Rated input power	1,400 W
No-load speed	13,200 rpm
Cutting depth	35 mm
Disc diameter	115 mm
Weight	2.9 kg

Cut-off Saw

GCO 230



Specifications

Power Input	2,300 W
No-load Speed	4,100 rpm
Disc Diameter	355 mm
Cutting Capacity	
Square Bar	☐ 120 x 120 mm
Round Pipe	☐ 129 mm
Rectangle	☐ 100 x 200 mm
L-profile	☐ 137 mm
Weight	13.5 kg

Circular Saw

GKS 130



Specifications

Rated input power	1300 W
Saw blade diameter	184 mm
No-load speed	6,380 rpm
Saw blade bore diameter	20 mm
Baseplate	290 x 150 mm
Guide rail compatible	no
Weight	3.9 kg

GKS 140



Specifications

Rated input power	1400 W
Saw blade diameter	184 mm
No-load speed	6,200 rpm
Saw blade bore diameter	20 mm
Baseplate	290 x 150 mm
Guide rail compatible	no
Weight	3.7 kg

Table Saw

GTS 254



Specifications

Power Input	1,800 W
Blade Size	254 mm
Arbour Size	30 mm
No-load Speed	4,300 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	555 x 555 mm
Weight	24.4 kg

Jigsaw

GST 750



Specifications

No-load Stroke rate	800 - 3,200 rpm
Rated input power	520 W
Saw, stroke length	20 mm
Bevel angle	-45 - 45 °
Weight	2.29 kg

Planer

GHO 6500



Specifications

Power Input	650 W
No-load Speed	16,500 rpm
Adjustable Chip Thickness	0 - 2.6 mm
Adjustable Rebating Depth	0 - 9 mm
Weight	2.8 kg

Sander

GSS 140



Specifications

Power Input	220W
No-load Speed	14,000 rpm
No-load Orbital Stroke Rate	28,000 min-1
Orbital Diameter	1.5 mm
Sanding Sheet Dimension	114 x 140 mm
Sanding Plate Dimension	101 x 112 mm
Weight	1.2 kg

GSS 140 A (with Dust Bag)



Specifications

Power Input	220W
No-load Speed	14,000 rpm
No-load Orbital Stroke Rate	28,000 min-1
Orbital Diameter	1.5 mm
Sanding Sheet Dimension	114 x 140 mm
Sanding Plate Dimension	101 x 112 mm
Weight	1.2 kg

Random Orbit Sander

GEX 125



Specifications

Power Input	280W
No-load Speed	7,500 - 12,000 rpm
No-load Orbital Stroke Rate	15,000 - 24,000
Orbit Diameter	2.6 mm
Sanding pad diameter	125mm
Weight	1.4 kg

Mixer

GRW 140



Power Input	1,400W
Bit holder	M14
No-load Speed	480/750 rpm
Max. Torque	10.0 / 7.0 Nm
Weight	4.2 kg

Plunge Router

GOF 130



Specifications

Power	1,300 W
No-load speed	11,000 - 28,000 rpm
Bit Holder	6 - 8.0 mm
Plunge depth	55 mm
Weight	3.5 kg

Trimmer

GKF 550



Specifications

Power Input	550 W
No-load Speed	33,000 rpm
Bix Size	6 mm / 1/4"
Weight	1.4 kg

Blower

GBL 650



Specifications

Power Input	650 W
No-load Speed	16,000 rpm
Air Flow Rate	3.7 m3/min
Weight	1.4 kg



Parts and Labor Included
*Terms & Conditions apply.

PROFESSIONAL 12V SYSTEM

Drill Driver

GSR 120-LI (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling Dia.:	
-In Steel	10 mm
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

GSR 12V-15 FC (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Drilling Dia.:	
-In Steel	10 mm
-In Wood	19 mm
Max. Torque (hard/soft)	30 / 15 Nm
No-load Speed	0 - 400 / 1,300 rpm
Chuck Capacity	10 mm
Weight excl. battery	0.6 kg

GSR 12V-30 (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Drilling Dia.:	
-In Steel	8 mm
-In Wood	20 mm
Max. Torque (hard/soft)	30 / 17 Nm
No-load Speed	0 - 420 / 1,600 rpm
Weight	0.82 kg

Impact Drill

GSB 120-LI (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Torque (Hard / Soft)	30 / 14 Nm
No-load Speed	0-400 / 0-1,500 rpm
Drilling Dia.:	
-In Wood	20 mm
-In Metal	10 mm
-In Masonry	8 mm
Weight excl. battery	0.9 kg

GSB 12V-30 (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Drilling Dia.:	
-In Steel	10 mm
-In Wood	20 mm
-In Masonry	8 mm
Max. Torque (hard/soft)	30 / 17 Nm
No-load Speed	0 - 420 / 1,600 rpm
Weight	0.82kg

Impact Driver

GDR 120-LI (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Max. Torque Hard	100 Nm
No-load speed	0 - 1,300 / 2,600 rpm
Impact rate	2,800 - 3,200 rpm
Max. Screw Dia.	8 mm
Bit Holder	1/4"
Weight	1.05 kg

GDR 12V-110 (Solo)



Specifications

Battery Voltage	12 V
Tool Holder	1/4" HEX Uni
No-load speed	0 - 1,200 / 2,600 rpm
Impact rate	0 - 2,700 / 3,100 bpm
Torque settings	2
Max. Torque	110 Nm
Weight excl. battery	1.5 kg

Circular Saw

GKS 12V-LI (Solo)



Specifications

Battery Voltage	12 V
No-load Speed	1,400 rpm
Depth of Cut - 90°	26.5 mm
Bore Diameter	15 mm
Max. Bevel	45°
Weight	1.4 kg

Jigsaw

GST 12V-LI (Solo)



Specifications

Battery Voltage	12 V
No-load Stroke Rate	1,500 - 2,800 spm
Stroke length	18 mm
Cutting Capacity	
-In Wood	70 mm
-In Aluminum/non alloy	3 mm
Weight	1.5 kg

Sabre Saw

GSA 12V-LI (Solo)



Specifications

Battery Voltage	12 V
Stroke speed	0 - 3,000 spm
Stroke Length	14.5 mm
Pipe Diameter	50 mm
Wood	65 mm

Multi-Cutter

GOP 12V-28 (Solo)



Specifications

Battery Voltage	12 V
Oscillation Angle	
on Left / Right	1.4°
No-load Speed	5,000 - 20,000 rpm
Weight	0.81 kg

Angle Grinder

GWS 12V-76 (Solo)



Specifications

Battery Voltage	12 V
No-load speed	19,500 rpm
Weight excl. battery	0.5 kg
Grinding Spindle Thread	M5
Bore Size, Diameter	10 mm
Grinding/Cutting disc, Dia	76 mm
Weight	0.9 kg

Rotary Tool

GRO 12V-35 (Solo)



Specifications

Battery Voltage	12 V
Max. Collet Diameter	3.2 mm
No-load Speed	5,000 / 32,000 rpm
Weight	0.62 kg

Random Orbit Sander

GEX 12V-125 (Solo)



Specifications

Battery Voltage	12 V
Pad diameter	125 mm
No-load speed	6,000 - 10,000 rpm
Orbit	2.5 mm
Weight excl. battery	0.95 kg

Planer

GHO 12V-20 (Solo)



Specifications

Battery Voltage	12 V
Planing width, max	56 mm
Planing depth	0 - 2 mm
Rebating depth	0 - 17 mm
No-load speed	14,500 rpm
Weight excl. battery	1.5 kg

Palm Router

GKF 12V-8 (Solo)



Specifications

Battery Voltage	12 V
Collet dia.	6 mm / 8 mm 1/4"
(RAP) mm	
No-load rotation	13,000 min-1
Weight	1.1kg

Vacuum

GAS 12 V-LI (Solo)



Specifications

Battery Voltage	12 V
Container Volume	0.35 l
Filter Surface	408 cm²
Max. Volume Flow Rate	15l/Sec
Max. Volume Pressure	45 mbar
Weight	0.9 kg

LED Torch

GLI 12V-80 (Solo)



Specifications

Battery Voltage	12 V
Weight excl. battery	0.14 kg
Luminous flux	80 lumen
Max. operating time	590 min / Ah

GLI 120 (Solo)



Specifications

Battery Voltage	12 V
Weight excl.t battery	0.15 kg
Luminous flux	300 lumen
Max. operating time	180 min / Ah

GLI 12V-330 (Solo)



Specifications

Battery Voltage	12 V
Runtime	6 h
Brightness	330 lumen
Max. operating time	180 min / Ah
Weight	0.3 kg

Pruner

Pro Pruner (Kit Set)



Specifications

Battery Voltage	12 V / 2.0 Ah
Battery Capacity	2.0 Ah
Max. cutting diameter	25 mm
Weight w/ 2.0Ah battery	1 kg
No. of cuts (using 2.0 Ah)	3,000

Batteries and Chargers

GBA 12V 2.0Ah



Specifications

Battery Voltage	12 V
Battery Capacity	2.0 Ah
Weight	180 g

GBA 12V 4.0Ah



Specifications

Battery Voltage	12 V
Battery Capacity	4.0 Ah
Weight	370 g

GBA 12V 6.0Ah



Specifications

Battery Voltage	12 V
Battery Capacity	6.0 Ah
Weight	370 g

Starter Kit 12V 2.0 Ah



Specifications

Battery Voltage	12 V
Battery Capacity	2.0 Ah
Battery charging voltage	12 V
Charge current	4 A

GAL 12V-40



Specifications

Battery charging voltage	10.8 - 12 V
Charge current	4 A
Weight	450 g

BoschGO

MINIMUM
EFFORT,
MAXIMUM
EFFICIENCY



3.6 V Screw Driver

Bosch Go Gen 2



Specifications

Battery Voltage	3.6 V
Torque (Hard/soft joint)	5/2.5 Nm
Speed	360 Rpm
Electronic brake	Yes
Smart stop	Yes
Tool holder	¼" Inter HEX

Bosch Go Gen 3



Specifications

Battery Voltage	3.6 V
Torque (Min/soft/Hard joint)	0.1/2.5/5 Nm
Speed	360 Rpm
Bit locker	Mechanical & Universal
Work LED	Ring LED & Battery status
Activation mode	Push start & Press button
Tool holder:	¼" Hex Uni

Kit Set: Batteries and charger included - Solo: Batteries and charger not included.



BOSCH

PRO MIX

FREE BATTERY AND MORE WITH BOSCH 18V TOOLS!



Promo period is July 1 to December 31, 2024.
Redeemable via BeConnected app.

Terms and Conditions apply.

BUY MORE, CHOOSE MORE, SAVE MORE



BeConnected

GET IT ON
Google Play

Download on the
App Store

DOWNLOAD NOW!



**BUY 2 TOOLS
GET GIFT SET 1**



**BUY 4 TOOLS
GET GIFT SET 2**



**BUY 6 TOOLS
GET GIFT SET 3**



**BUY 12 TOOLS
GET GIFT SET 4**



TERMS AND CONDITIONS

- Only new purchase of participating Bosch Professional 18V cordless tools in the Philippines within the promo period are qualified for this promotion. Find the list of participating tools in the BeConnected app.
- Purchase period is July 1 to December 31, 2024.
- User must download the BeConnected app and create a user account.
- User must register their new 18V tools in the BeConnected app by scanning the QR code or manually register by entering the serial number and baretool number of the tool.
- User must complete the tool registration to earn PROMIX points for this promotion:
 - Upload valid invoice that clearly shows the purchased product under the PROMIX offer and the date of purchase
 - Upload photo of the tool nameplate (must clearly show the tool serial number)
- User will earn 100 PROMIX Points for every valid tool registration. Further points can be accumulated within the promo period to redeem the desired gift set.
- PROMIX points will only be credited upon validation within 5 working days.
- Maximum PROMIX points that can be earned per user is 1,200 for the entire promo duration.
- User must claim the desired gift set via BeConnected app under Gift Redemption Center by using the earned PROMIX points. Existing Promix points can still be used to redeem gift sets.

GIFT SETS	INCLUSIONS	PROMIX POINTS	TOOLS REQUIRED
GIFT SET 1	(1) GBA 18V 4.0Ah battery	200	2
GIFT SET 2	(2) GBA 18V 4.0Ah battery and (1) Bosch Tool bag	400	4
GIFT SET 3	(1) ProCORE18V 4.0Ah battery (1) ProCORE18V 8.0Ah battery and (1) Bosch Tool bag	600	6
GIFT SET 4	(2) ProCORE18V 4.0Ah battery (2) ProCORE18V 8.0Ah battery (1) GAL 1880 CV Quick Charger and (1) Bosch Tool bag	1,200	12

- The redeemed gift set will be delivered directly to the user's shipping address free of charge, within 60 days from redemption date.
- Gift sets can be redeemed within 60 days after end of promo period.
- Points and rewards are not transferable and not convertible to cash.
- Bosch has the sole and absolute discretion to revoke, deduct and/or invalidate claims, including but not limited to the following events:
 - computer error, operator error; or
 - the User is proven to have breached these Terms; committed fraud or acted dishonestly; and/or abused the Programme in any manner whatsoever.
- Corporate users are not included in this promotion.
- Employees of Bosch and partner dealers including their relatives of up to 2nd degree of consanguinity or affinity are disqualified from joining the promotion.

Per DTI Fair Trade Permit No. FTEB-196601 Series of 2024.

PROFESSIONAL 18V SYSTEM

Drill Driver

GSR 185-LI (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
No-load speed	0 – 500 / 0 – 1,900 rpm
Max. Torque (soft/hard)	50 / 21 Nm
Max. Screw Diameter	10 mm
Max. Drilling Dia.:	
-In Wood	35 mm
-In Metal	10 mm
Chuck material	Metal
Weight	1.3 kg

GSR 18V-50 (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
Torque	28/50/50 Nm
Chuck type	Metal
No load speed	0 – 460 / 0 – 1,800 rpm
Max. Drilling dia.:	
-In Steel	13 mm
-In Wood	35 mm
Max. Screw	10 mm

GSR 18V-90 C (Solo)



Specifications

Battery voltage	18 V
Max. Torque (hard/soft)	36 / 64 Nm
No-load speed	0 – 630 / 0 – 2,100 rpm
Chuck type	Metal, 13 mm
Max. Drilling dia.:	
-In Steel	13 mm
-In Wood	68 mm
Max. Screw	12 mm

Impact Drill

GSB 183-LI (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
Max. Torque (hard/soft)	56 / 21 Nm
No-load Speed	0-440 / 1,650 rpm
Max. Drilling Dia.:	
-In Wood	35 mm
-In Metal	10 mm
-In Masonry	10 mm
Chuck type	Metal
Weight	1.6 kg

GSB 185-LI (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
No-load Speed	0-500 / 1,900 rpm
Max. Torque (hard/soft)	50 / 21 Nm
Max. Screw Diameter	10 mm
Max. Drilling Dia.:	
-In Wood	25 mm
-In Metal	10 mm
-In Masonry	10 mm
Chuck type	Metal
Weight	1.3 kg

Impact Drill

GSB 18V-50 (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
Max. Torque (hard/soft)	50 / 28 Nm
Chuck Type	Metal
No-load speed	0-460 / 0-1,800 rpm
Max. Drilling Dia.:	
-In Steel	13 mm
-In Wood	35 mm
-In Masonry	13 mm
Max. Screw	10 mm

GSB 18V-90 C (Solo)



Specifications

Battery voltage	18 V
Torque	36 / 64 Nm
No-load speed	0 – 630 / 0 – 2,100 rpm
Chuck type	Metal, 13 mm
Max. Drilling Dia.:	
In Wood	68 mm
In Steel	13 mm
In Masonry	13 mm
Max. Screw	12 mm

Impact Driver

GDR 180-LI (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
Max. Torque	160 Nm
No-load Speed	0-2,800 rpm
Impact Rate	0-3,600
Bit Holder / Shank	1/4" Hex
Head Length	150 mm

GDR 18V-220 C (Solo)



Specifications

Battery Voltage	18 V
Max. Torque	220 Nm
No-load Speed	0-1,100 / 2,300 / 3,400 rpm
Impact Rate	0-2,200 / 3,300 / 4,000 bpm
Tool holder	1/4" Hex Uni
Torque settings	3
Head length	113 mm

Impact Driver Wrench

GDX 180-LI (Kit Set)



Specifications

Battery Voltage	18 V / 2.0 Ah
No-load Speed	0 - 2,800 rpm
Impact Rate	0 - 3,600 bpm
Max Torque	180 Nm
Head Length	170 mm
Bit Holder/Shank	1/4 Hex; 1/2" Square
LED light	Yes - above trigger

Impact Driver Wrench

GDX 18V-200 (Solo)



Specifications

Battery Voltage	18 V
Max. torque	200 Nm
No-load speed	0 – 3,400 rpm
Impact rate	0 – 4,200 rpm
Tool holder	½" Hex; ½" square
Screw dia.	M10 – M20

Impact Wrench

GDS 250-LI (Kit Set)



Specifications

Battery	18 V / 4.0 Ah
Charger	AL 18 40 CV
No-load Speed	0 - 2,400 rpm
Impact Rate	0 - 3,300 bpm
Tool Holder	1/2" Square
	(Pin Hole+ Retention Ring)
Screw Size	M10 - M18

GDS 18V-350 (Kit Set/Solo)



Specifications

Battery Voltage	18 V / 4.0 Ah
Max. torque	350 Nm
No-load speed	0 – 2,300 rpm
Impact rate	0 – 3,400 rpm
3 speed selection	
Tool holder	½" square
Bolt size Max.	M18

GDS 18V-400 (Solo)



Specifications

Battery Voltage	18 V
Max. torque	400 Nm
No-load speed	0 – 2,500 rpm
Impact rate	0 – 3,700 rpm
Breakaway torque	600 Nm
Tool holder	½" square
Screw dia.	M10 – M20

Rotary Hammer (SDS Plus)

GBH 185-LI (Kit Set/Solo)



Specifications

Battery Voltage	18 V / 4.0 Ah
Modes	Drill/Hammer Drill/Chisel
Impact energy	1.9 J
Impact rate	0 – 4,675 bpm
No-load speed	0 – 1,050 rpm
Drilling in concrete	4-22 mm
Tool holder	SDS plus

Rotary Hammer (SDS Plus)

GBH 187-LI (One chuck) (Kit Set/Solo)



Specifications

Battery Voltage	18 V / 5.0 Ah
Modes	Drill/Hammer Drill/Chisel
Impact energy	2.4 J
Impact rate	0 – 4,350 bpm
No-load speed	0 - 980 rpm
Max. drilling in concrete	4 - 24 mm
In steel/ In Wood	13 mm/ 30 mm
Tool holder	SDS Plus/ Cylindrical Hex

GBH 18V-28 CF (Solo)



Specifications

Battery Voltage	18 V
Modes	Drill/Hammer Drill/Chisel
Impact energy	3.3 J
Impact rate	0 – 4,220 bpm
No-load speed	0 - 950 rpm
Max. drilling in concrete	28 mm
Tool holder	SDS Plus w/ Quick Change Chuck

Angle Grinder

GWS 180-LI (Solo)



Specifications

Battery Voltage	18 V
No-load speed	11,000 rpm
Disc dia.	100 mm
Spindle size	M10
Weight	1.4 kg (tool only)

GWS 18V-10 (Solo)



Specifications

Battery Voltage	18 V
No-load speed	9,000 rpm
Disc dia.	100 mm
Spindle size	M10
Weight excl. battery	2.1 kg

GWS 18V-10 P (Solo)



Specifications

Battery Voltage	18 V
No-load speed	9,000 rpm
Disc dia.	100 mm
Spindle size	M10
Weight excl. battery	2.1 kg
Paddle Switch	

Angle Grinder

GWX 180-LI (Solo)



Specifications

Battery Voltage	18 V
No-load speed	11,000 rpm
Disc dia.	125 mm
Tool holder	X-LOCK
Weight excl. battery	1.6 kg

Rivet Gun

GRG 18V-16 C (Solo)



Specifications

Battery Voltage	18 V
Motor	Brushless
Pulling Force	16,000 N
Stroke length	25 mm
Rivet Diameter	3.0 - 6.4 mm
Weight excl. battery	1.6 kg

Metal Circular Saw

GKM 18V-50 (Solo)



Specifications

Saw blade bore	136 / 20 mm
No-load speed	4,250 rpm
Cutting depth 90°	50 mm
Weight excl. battery	2.2 kg

Circular Saw

GKS 185-LI (Solo)



Specifications

Battery Voltage	18 V
No-load speed	5,000 rpm
Cutting depth 0°/45°	57/41 mm
Saw blade bore	165 / 20 mm
Bevel capacity Max.	50°
LED Work area illumination	Yes

GKS 18V-57 G (Solo)



Specifications

Battery Voltage	18 V
No-load speed	3,400 rpm
Saw blade bore	165 / 20 mm
Max. Cut in wood	(90°) 57 mm
	(45°) 42 mm
Guide rail	FSN Compatible

Kit Set: Batteries and charger included - Solo: Batteries and charger not included.

GLF 18V-8 Professional

Cordless Router



WHY THIS

- 01 Smooth routing with sufficient power**
 - Brushless motor
 - Constant speed
- 02 Smooth routing with safety**
 - Cooling ventilation
 - Drop protection
- 03 Smooth routing with ease**
 - Durable clamp system
 - Smooth cog wheel system
 - Increased visibility with LED and transparent base



TARGET USERS

Cabinet installers & Carpenters | Furniture / wood-based serial production



GLF 18V-8 Professional	Unit	Specifications
Battery voltage	V	18
EC or DC	—	EC
No-load speed	rpm	10,000-30,000
Collet size	mm	6, 1/4", 8
Drop protection	—	Yes
Variable speed	—	Yes
Constant speed	—	Yes
LED	—	Yes
Dust extractor	—	Yes

GDS 18V-350 Professional

Cordless Impact Wrench



WHY THIS

- 01 Superior torque**
 - Up to 350 Nm tightening torque
- 02 Easy handling**
 - Compact tool size with 131 mm length for easy handling and working in tight spaces
- 03 High efficiency**
 - Uninterrupted working with less recharging due to low energy consumption design



TARGET USERS

HVAC | Electrician | Foundation & Structure | Auto repair



GDS 18V-350 Professional	Unit	Specifications
Voltage	V	18
Anvil type	—	1/2" Friction ring plus pin hole
Tightening torque (fwd)	Nm	350
Breakaway torque	Nm	560
No-load speed	rpm	0-2,300
Impact rate	bpm	0-3,400
Bolts size	—	Max. M18
Weight w/o battery	kg	1.1

*Tested under Bosch lab condition with C-sample in speed setting (2) with Bosch GBA 4.0AH battery

Jigsaw

GST 183-LI (Solo)



NEW

Specifications

Battery Voltage	18 V
No-load stroke rate	0-3,300 spm
Stroke height	20 mm
Bevel angle	-45 – 45 °
Weight excl. battery	1.6 kg

GST 185-LI (Solo)



NEW

Specifications

Battery Voltage	18 V
No-load stroke rate	0-3,500 spm
Stroke height	26 mm
Bevel angle	-45 – 45 °
Weight excl. battery	2 kg

GST 18V-155 SC (Solo)



Q4 2024

Specifications

Battery Voltage	18 V
Stroke rate	800–3,800 spm
Stroke length	26 mm
Cutting depth	155 mm
Weight excl. battery	2.0 kg

Reciprocating Saw

GSA 185-LI (Solo)



NEW

Specifications

Battery Voltage	18 V
No-load speed	0- 2,900' min ⁻¹
Stroke length	28 mm
Weight excl. battery	3.2 kg
Cutting depth	
-In wood	230 mm
-Metal profile & pipes	150 mm

Drywall Cut-Out Tool

GCU 18V-30 (Solo)



NEW

Specifications

Battery Voltage	18 V
No-load speed	30,000 rpm
Collet diameters	3 mm, 6 mm, 1/4"
IP5X dust resistant-switch	

Drywall Screwdriver

GTB 185-LI (Solo)



Specifications

Battery Voltage	18 V
Max. torque	32 Nm
No-load speed	0 – 4,500 rpm
Bit holder	1/4" Hex Uni
Screw dia.	6 mm
Weight excl. battery	0.95 kg

Multi-Cutter

GOP 185-LI (Solo)



Specifications

Battery Voltage	18 V
Motor Type	Brushless
No Load Speed	10,000-20,000 rpm
Oscillating Angle (degree)	3.4
Starlock Type	Starlock Plus
Quick Change	SDS Snap in
Vibration Plunge Cut Wood:	3.4 m/s2
Weight w/o Battery	1.2 kg

Planer

GHO 185-LI (Solo)



Specifications

Battery Voltage	18 V
Planing Width Max	82 mm
Planing Depth	0 - 2.6 mm
No Load Speed	14,000 rpm
Rebating Depth	0 - 9 mm

Router

GLF 18V-8 (Solo)



NEW

Specifications

Battery Voltage	18 V
No-load speed	10,000-30,000 rpm
Collet size	6, 1/4", 8 mm
Drop protection	Yes
Variable speed	Yes
Constant speed	Yes
LED illumination	Yes
Dust extractor	Yes

Random Orbit Sander

GEX 185-LI (Solo)



Specifications

Battery Voltage	18 V
No-load speed	6,000 – 10,000 rpm/min
Orbital stroke rate	12,000 – 20,000 opm
Eccentricity	1.25 mm
Sanding sheet	Hook-and-loop
Sanding pad diameter	125 mm
Orbit Dia.	2.5 mm
Weight (bare tool)	0.93 kg

Random Orbit Sander

GEX 18V-125 (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
No-load speed	6,000 – 10,000 rpm
Orbital stroke rate	12,000 – 20,000 opm
Eccentricity	1.25 mm
Sanding sheet	Hook-and-loop
Orbit dia.	2.5 mm
Weight (Bare tool)	1.1 kg

Orbital Sander

GSS 18V-LI (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
No-load Orb. Stroke	11,000-22,000 opm
Oscillating Circuit Diameter:	1.6 mm
Sanding Surface	114 cm2

GSS 18V-13 (Solo)



Q4 2024

Specifications

Battery Voltage	18 V
No-load speed	6,000 – 10,000 rpm
No-load Orb. Stroke	12,000-20,000 opm
Orbit Diameter:	1.6 mm
Sanding Surface	114 cm2
Weight excl. battery	1.1 kg

Heat Gun

GHG 18V-50 (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Heat up Time	<6 sec
	(up to 300 c)
Temperature Lvl	2 (300/600 c)
Max Airflow (In l/min)	175
Accessories	Reduction Nozzle, Refelction Nozzle

Blower

GBL 18V-120 (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
No-load Speed	17,000 rpm
Air Speed, Max	75 m/s
Air Volume	2.0 m³/min
Runtime	Speed I : 9 min/Ah
	Speed II: 5 min/Ah
Weight without Cable:	1.1 kg

Vacuum

GAS 18V-1 (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Container vol.	0.7 L
Filter surface area	55 cm²
Max. Airflow rate	10 l/s
Max. Vacuum pressure	60 mbar
Runtime	7 min / Ah

GAS 18V-10LPremium (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Max. Vacuum	90 mbar
Max. Airflow	24 l/sec
Max. runtime with	
6.0 Ah Battery	24 min
Dust Class (EU Standard):	L-class
Container Vol. Gross/net:	
10/6 litre/gallons	
Weight	4.6 kg

Radio

GPB 18V-2 C (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Input Voltage	240 V
Radio Freq.	87.5 – 08 MHz
Amplifier power	15 W
Interface FM, Aux & Bluetooth	

LED Jobsite Light

GLI 180-LI (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Luminous Flux	300 Lumen
Max. operating time	300 mins/Ah
Weight	0.6 kg

GLI VariLED (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Luminous Flux	420 Lumen
Max. operating time	135 mins/Ah
Weight	0.3 kg

LED Jobsite Light

GLI 18V-800 (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Luminous Flux	800 / 500 / 250 lm
Max. operating time	150 min/Ah
Mounting options	Magnet, Hook
Weight	0.3 kg

GLI 18V-1900 (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Max. Brightness	1,900 Lumen
Runtime	100 min / Ah
Brightness level	2

GLI 18V-1200 C (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Luminous Flux	1,200 Lumen
Runtime	130 min / Ah
Brightness level	2

GLI 18V-4000 C (Solo)



HEAVY DUTY

Specifications

Battery Voltage	18 V
Luminous Flux	4,000 Lumen
Runtime	30 min / Ah
Brightness level	3

PROFESSIONAL
18V
SYSTEM

MIX & MATCH!
Combine as you need

1. Choose your solo tool



+

2. Choose your batteries and charger



BITURBO

BRUSHLESS



**Unleash up to 2,000W of equivalent corded power
with ProCORE18V battery and BITURBO tools**

Neodymium
High-
performance
motor



+



Our most
powerful
battery ever

**UP TO 2,000 WATTS
OF CORDED POWER**



BITURBO
BRUSHLESS

BITURBO BRUSHLESS TOOLS

- High-performance brushless motors: Using the world's strongest commercially available magnets, the motor exploits the full potential of ProCORE18V batteries for up to 2,000W of equivalent corded power
- Comfort first: Outstanding power-to-weight ratio and ergonomic design make the extreme power of BITURBO tools lighter and easier to handle
- High user-protection: Equipped with intelligent features to lower the risk of common injuries and put you in ultimate control:
e.g. KickBack Control, Drop Control, Vibration Control

Pro**CORE**18V

For maximum power of BITURBO tools, use
ProCORE18V+ 8.0Ah, ProCORE18V 8.0Ah or
12.0Ah batteries.



<https://www.bosch-pt.com.ph/ph/en/biturbo>

It's in your hands. Bosch Professional.

BITURBO BRUSHLESS

Drill Driver

GSR 18V-150 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS NEW

Specifications

Battery Voltage	18V
Torque settings	84/100/150 Nm
No-load speed	0 – 550 / 2,200 rpm
Chuck size	1.5 / 13 mm, Metal
Max. Impact rate	30,000 bpm
Max. Drilling	
-In Wood	150 mm
-In Steel	16 mm

Impact Drill Driver

GSB 18V-150 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
Torque settings	84/100/150 Nm
No-load speed	0 – 550 / 2,000 rpm
Chuck size	1.5 / 13 mm, Metal
Max. Impact rate	30,000 bpm
Max. Drilling	
-In Wood	150 mm
-In Steel	16 mm
-In Concrete	20 mm

Impact Wrench

GDS 18V-1000 (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
Torque level	350/700/1,000 Nm
No-load speed	0 – 1,750 rpm
Anvil Type	1/2" Square
Max. Impact rate	2,600 bpm
Screw diameter	M14 – M24
Breakaway torque	1,600 Nm

GDS 18V-1050 H (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
Torque level	350/750/1,050 Nm
No-load speed	0 – 1,750 rpm
Anvil Type	3/4" Square
Max. Impact rate	2,600 bpm
Screw diameter	M14 – M24
Breakaway torque	1,700 Nm

Impact Wrench

GDS 18V-1600 HC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
Anvil Type	3/4" Square
Max. tightening torque	1,600 Nm
Max. breakaway torque	2,200 Nm
Speed level	3 speed settings
No-load speed	0-800/1300/1750 rpm
Impact rate	0-1550/2200/2350 bpm
Screw diameter	M16 – M33
Adjustable Screw Modes	

Circular Saw

GKS 18V-68 GC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	2,500 - 5,000 rpm
Disc dia.	190 mm
Max. Cutting	(90°) 68 mm (45°) 50 mm
Weight	4.3 kg (tool only)
Eco-mode, Speed setting	
Guidrail compatible	

Plunge Saw

GKT 18V-52 GC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	2,800 - 5,500 rpm
Disc dia.	140 mm
Max. Cutting	(90°) 52 mm (45°) 32 mm
Bevel angle	-1 – 47 °
Weight	4.1 kg (tool only)
Eco-mode, Speed setting	
Guidrail compatible	

Rotary Hammer (SDS Max)

GBH 18V-36 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
Max. Impact energy	7 J
Impact rate	0 – 2,900 bpm
Rated speed	0 – 500 rpm
Tool holder	SDS Max
Drilling dia.	14 – 35 mm
Weight	5.1 kg (tool only)
Anti-Kickback & Vibration	

Rotary Hammer (SDS Max)

GBH 18V-45 C (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
Max. Impact energy	12.5 J
Impact rate	0 – 2,760 bpm
Rated speed	0 – 305 rpm
Tool holder	SDS Max
Drilling dia.	12 – 45 mm
Weight	8 kg (tool only)
Anti-Kickback & Vibration	

Sliding Mitre Saw

GCM 18V-216 D (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	5,000 rpm
Disc dia. / Bore Size	216 / 25.4 mm
Mitre setting	48 ° L / 48 ° R
Bevel setting	47 ° L / 47 ° R
Cutting cap.	(0°) 66 x 305 mm (45° mitre) 66 x 215 mm (45° bevel) 42 x 305 mm
Weight	16.2 kg (tool only)

GCM 18V-254 D (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	4,500 rpm
Disc dia.	254 mm
Mitre setting	47 ° L / 47 ° R
Bevel setting	45 ° L / 0 ° R
Cutting cap.	(0°) 90 x 305 mm (45° mitre) 90 x 215 mm (45° bevel) 55 x 305 mm
Weight	18 kg (tool only)

Glide Mitre Saw

GCM 18V-305 GDC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	2,550 - 4,000 rpm
Disc dia.	305 mm
Mitre setting	52 ° L / 60 ° R
Bevel setting	47 ° L / 47 ° R
Cutting cap.	(0°) 104 x 341 mm (45° mitre) 104 x 240 mm (45° bevel) 40 x 341 mm
Weight	26.9 kg (tool only)

Table Saw

GTS 18V-216 (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	4,500 rpm
Disc dia.	216 mm
Table size	658 x 553 mm
Cutting height	70 mm
Max. Cutting (R)	635 mm
Weight	21.6 kg (tool only)
Soft Start, Restart Protection	

Angle Grinder

GWS 18V-15 SC (Solo)



HEAVY DUTY BITURBO BRUSHLESS

Specifications

Battery Voltage	18V
No-load speed	3,400 - 11,000 rpm
Disc dia.	100 mm, M10
Equal to corded	1,500 W
Weight	2.1 kg (tool only)
Speed Selector, Drop Control	
Kickback Control, Restart Prot.	

To experience the maximum power of BITURBO tools, use **ProCORE18V 8.0 Ah or 12.0 Ah** batteries.

Don't worry, both BITURBO and ProCORE18V are part of our Professional 18V System, which means they are fully compatible with all our new and existing Bosch Professional 18V products – since 2008.



Battery Pack

GBA 18V 2.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	2.0 Ah
Weight	350 g

GBA 18V 4.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Weight	610 g

ProCORE18V 4.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Weight	515 g

ProCORE18V 8.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	8.0 Ah
Weight	955 g

ProCORE18V+ 8.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	8.0 Ah
Weight	1.0 kg
Tabless cell technology	

Battery Pack

ProCORE18V 12.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	12.0 Ah
Weight	1,350 g

Starter Kit

Starter Kit 18V 2.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	2.0 Ah
Charger Current	4 A

Starter Kit 18V 4.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Charger Current	4 A

Starter Kit ProCORE18V 4.0 Ah



Specifications

Battery Voltage	18 V
Battery Capacity	4.0 Ah
Charger Current	8 A

Chargers

GAL 18V-40



Specifications

Charging voltage	14.4 - 18V
Charge current	4A
Weight	555 g

Chargers

GAL 1880 CV



Specifications

Charging voltage	14.4 - 18V
Charge current	8A
Weight	700 g

GAL 18V-160



Specifications

Charging voltage	14.4 - 18V
Charging Current	16 A
Weight	950 g
Charging mode	Power Boost / Normal

GAL 18V-160 C



Specifications

Charging voltage	14.4 - 18V
Charging Current	16 A
Weight	950 g
Mode	Power Boost Bluetooth

GAL 18V6-80



Specifications

Charging Voltage	14.4 - 18V
Charging Current	8 A
Charging bay	6 slots
Weight	1,800 g

Bluetooth Module

GCY 42




Specifications

Bluetooth Module for tools with connectivity	
--	--


THE FIRST 18V BATTERY WITH TABLESS DESIGN

ProCORE18V+ 8.0Ah

NEW!

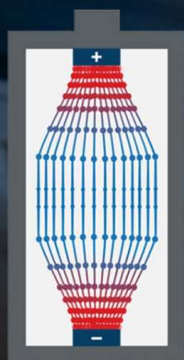

VS.



TAB DESIGN TABLESS DESIGN





BOSCH

REDEFINING THE HIGH-PERFORMANCE BATTERY

The **NEW** ProCORE18V+ 8.0Ah

Revolutionary tabless cell technology ensures a longer runtime and maximum power for your heavy-duty applications.

up to
1,000W¹

ProCORE18V

4.0Ah

All the power of a conventional battery - but without the weight. Best for strenuous positions (e.g. overhead work)



ProCORE18V

8.0Ah

The perfect balance of weight and power. Best paired with BITURBO tools for maximum performance



NEW

UP TO 71%⁴ LONGER RUNTIME

For heavy-duty applications thanks to the highly innovative tabless cell technology

EXTENDED BATTERY LIFETIME²

Thanks to outstanding heat management with COOLPACK 2.0 and the tabless cell technology

ProCORE18V+

8.0Ah

Revolutionary tabless cell technology provides longer runtime for BITURBO tools- ensuring maximum power for your heavy-duty applications



up to
2,000W¹

ProCORE18V

12.0Ah

Maximum performance and longest runtime. Best paired with BITURBO tools for maximum performance to complete extreme applications



DISCOVER THE ADVANTAGES OF ProCORE18V+ 8.0Ah



ProCORE18V

PERFORMANCE

- Up to 2,000W equivalent corded power with ProCORE18V $\geq 5.5\text{Ah}$, optimally suited for BITURBO tools
- Up to 1,000W equivalent corded power with ProCORE18V 4.0Ah, but more compact and lightweight than a standard battery

CELLS

- 21700 high-performance cells


HEAT MANAGEMENT

- COOLPACK 2.0 technology more than doubles the lifetime of standard batteries without COOLPACK 2.0
- No air gaps between the cells: every cell is fully covered with HDPE material for optimal heat dissipation
- Cooper cell connectors for lower resistance, less power loss, and highly efficient heat release


ProCORE18V+ NEW

- Up to 2,000W equivalent corded power with ProCORE18V+ 8.0Ah, optimally suited for BITURBO tools
- **Up to 71%¹ Longer runtime for heavy-duty applications** thanks to the highly innovative tabless cell technology
- **ProCORE18V+ 8.0Ah most compact battery with highest energy density** (compared to competition's high performance batteries in same capacity and voltage class)

- **Tabless** 21700 high-performance cells with countless parallel current paths
- **50% lower inner resistance**
- **Less battery heating**
- **Longer runtime**



Tab Design



Tabless Design

- Same benefits as ProCORE18V
- **Extended battery lifetime²** thanks to outstanding heat management with COOLPACK 2.0 and the tabless cell technology

ONE BATTERY FITS ALL

ProCORE18V+ is compatible with new and existing Bosch Professional tools in the same voltage class since 2008 and the multi-brand battery alliance, AMPShare.

^{*1} Up to 71% more drill holes in concrete. Ø25mm drilling in concrete C30/37. Drill bit 8X Ø25x400mm. 150mm deep/ hole. Total drilling distance until stop (30s drilling, 30s break).

^{*2} Up to 44% more removal of metal material. Grinding with a Bosch flap disk (2608619209) at 30-second intervals with a 5-second break in between. Application on a 200x10 steel plate (mild steel).

UNLOCK A NEW LEVEL OF PERFORMANCE

The next generation of high-power batteries is here. With tabless cell technology, ProCORE18V+ 8.0Ah gives your BITURBO tools greater performance and longer runtime than ProCORE18V 8.0Ah, so you can complete heavy-duty applications with ease.



PROFESSIONAL GARDEN 18V SYSTEM

Hedge Cutter

GHE 18V-60
(Solo)

NEW



Specifications

Battery Voltage	18V
Blade length (cm)	60
Cutting capacity (mm)	20
Tooth opening (mm)	23
No-load stroke rate (spm)	3,000
Weight excl. battery (kg)	3

Leaf Blower

GBL 18V-750
(Solo)

BITURBO
BRUSHLESS

NEW



Specifications

Battery Voltage	18V
Max. Air Speed (km/h)	198
Max. Air flow (m³/h)	780
Weight excl. Battery (kg)	2.9

Grass Trimmer

GRT 18V-33
(Solo)

NEW



Specifications

Battery Voltage	18V
Cutting Diameter line (cm)	33
Line diameter (mm)	2.4
Main handle type	D-shape
No-load Speed (rpm)	4500-6400
Weight excl. battery (kg)	3.5

Brush Cutter

GFR 18V-23
(Solo)

NEW



Specifications

Battery Voltage	18V
Cutting Diameter line (cm)	33
Line diameter (mm)	2.4
Cutting Diameter Blade (cm)	23
Blade thickness (mm)	2
Diameter bore hole (mm)	25.4
No-load Speed (rpm)	4500-6400
Main handle type	D-shape
Weight excl. battery (kg)	3.6



GHE 18V-60



GBL 18V-750



GRT 18V-33



GFR 18V-23



BOSCH

CHOOSE 18V BATTERY FOR THE MOST EFFICIENT POWER OUTPUT!

Interchangeable battery system since 2008

Compact

Performance

Endurance

2.0 Ah

4.0 Ah

4.0 Ah

5.0 Ah

6.0 Ah

8.0 Ah

12.0 Ah



Biturbo Tools

BITURBO

Drill/Driver & Impact Drill (GSR/GSB)



Impact Driver/Wrench (GDS/GDX/GDR)



Rotary Hammer (GBH <2.0 J)



Rotary Hammer (GBH 2.0-4.0 J)



Sabre Saw (GSA <25mm stroke lengths)



Sabre Saw (GSA >25mm stroke lengths)



Circular Saw (GKS/GKM/GKT)



Vacuum (GAS >1L) & Heat Gun (GHG)



Straight Grinder (GGS)



& Rivet Gun (GRG)



Orbital Sander (GSS)



& Random Orbit Sander (GEX)

Planer (GHO), Shear (GSC)



Multi Cutter (GOP) & Drywall Router (GCU)



Angle Grinder (GWS)



Vacuum (GAS <1L) & Blower (GBL)



Worklight (GLI) & Radio (GML & GPB)



Jigsaw (GST) & Band Saw (GCB)



Table Saw (GTS)



Rotary Hammer (GBH >4.0 J)



Mitre Saw (GCM)



**BOSCH**

SAVE TIME WITH BOSCH QUICK CHARGING SOLUTIONS



GAL 18V-160 C



GAL 18V6-80



GAL 1880 CV



GAL 18V-40



GAX 18V-30



GAL 18V-20



GBA 2.0 Ah

80%

15 min

16 min

15 min

24 min

35 min

50 min

100%

25 min

24 min

30 min

35 min

45 min

65 min



GBA 4.0 Ah

80%

15 min

23 min

25 min

48 min

65 min

95 min

100%

25 min

37 min

35 min

65 min

85 min

125 min



GBA 5.0 Ah

80%

20 min

28 min

30 min

60 min

82 min

120 min

100%

35 min

47 min

45 min

70 min

107 min

150 min

ProCORE18V
4.0 Ah

Power Boost Mode

50%

9 min

80%

21 min

Standard Mode

80%

32 min

32 min

32 min

48 min

65 min

95 min

100%

51 min

50 min

51 min

65 min

85 min

125 min

ProCORE18V
8.0 Ah &
ProCORE18V+
8.0 Ah

Power Boost Mode

50%

15 min

80%

26 min

Standard Mode

80%

32 min

42 min

68 min

113 min

100%

51 min

68 min

79 min

124 min

ProCORE18V
12.0 Ah

Power Boost Mode

50%

22 min

80%

36 min

Standard Mode

80%

36 min

65 min

113 min

162 min

100%

55 min

96 min

126 min

172 min

MOBILITY SYSTEM



BOSCH FSN GUIDE RAIL SYSTEM

GUIDERAILS

Works with circular saw ending GCE or G



CARRY BAG



FSN BAG
Fits up to two FSN 1600

ADAPTERS



FSN OFA
For Routers



FSN SA
For GST Cordless Jigsaw

FUNCTIONAL PIECE



FSN WAN
Miter Segment



FSN VEL
Connecting piece

RUBBER PARTS



FSN HB
Anti-slip strip



FSN SS
w/ Splinter Protection



FSN KK
End cap covers



FSN KZW
Fast fix clamps



FSN RS
Kickback stop

ADDITIONAL SUPPORT

Drywall Screwdriver

GTB 650



Specifications

Rated Input Power	650 W
No-load speed	0 - 5,000 rpm
Rated speed	0 - 5,200 rpm
Torque, max.	12 Nm
Bit Holder	1/4" internal hex
Self-drilling screw dia.	6 mm
Screw dia.	4 mm
Weight	1.4 kg

Auto-feed Attachment

GMA 55



Specifications

Max. screw diameter	5 mm
Screw head diameter, max.	9.5 mm
Screw length	25 - 55 mm
Weight	0.36 kg
Compatibility	All Bosch Professional corded and cordless drywall screwdrivers

Drill

GBM 6 RE



Specifications

Rated Input Power	350 W
No-load Speed	0 - 4,000 rpm
Power Output	136 W
Rated Speed	3,116 rpm
Rated Torque	12.3 Nm
Weight	1.2 kg

GBM 400



Specifications

No-load speed	0 - 2,800 rpm
Rated input power	400 W
Weight	1.283 kg
Power output	180 W
Chuck capacity, min./max.	10 mm

GBM 10 RE



Specifications

Power Input	450 W
In Steel	10 mm
In Aluminium	10 mm
In Wood	25 mm
No-load Speed	0 - 2,600 rpm
Weight	1.3 kg

Drill

GBM 13 RE



HEAVY DUTY

Specifications

Power Input	600 W
In Steel	13 mm
In Aluminium	13 mm
In Wood	30 mm
No-load Speed	0 - 2,600 rpm
Weight	1.65 kg

GBM 1600 RE



HEAVY DUTY

Specifications

Rated Input Power	850 W
No-load Speed	0 - 630 rpm
Max Torque	11.0 Nm
Chuck Capacity	1-16 mm
Weight	3 kg

Impact Drill

GSB 10 RE



HEAVY DUTY

Specifications

Power Input	500 W
In Masonry	10 mm
In Steel	8 mm
In Wood	20 mm
No-load Speed	0 - 2,600 rpm
Weight	1.5 kg

GSB 600



HEAVY DUTY

Specifications

Power Input	600 W
No-load Speed	0 - 3,000 rpm
Impact rate	0 - 48,000 bpm
Drilling in wood	25 mm
Drilling in concrete	13 mm
Drilling in Steel	10 mm
Chuck capacity	13 mm
Drilling in Masonry	13 mm
Weight	1.7 kg

GSB 13 RE Wrap



HEAVY DUTY

Specifications

Power Input	650 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,150 rpm
Impact rate at no-load speed	0-47,000 bpm
In concrete	13 mm
In steel	10 mm
In wood	20 mm
Weight	2 kg

Impact Drill

GSB 13 RE Hand Tools



HEAVY DUTY

Specifications

Power Input	650 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,150 rpm
Impact rate at no-load speed	0-47,000 bpm
In concrete	13 mm
In steel	10 mm
In wood	20 mm
Weight	2 kg

GSB 16 RE Carton



HEAVY DUTY

Specifications

Power Input	750 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,250 rpm
Impact rate at no-load speed	0 - 48,500 bpm
In concrete	16 mm
In steel	12 mm
In wood	25 mm
Weight	1.8 kg

GSB 16 RE Wrap



HEAVY DUTY

Specifications

Power Input	750 W
Chuck Capacity	1.5 - 13 mm
No-load speed	0 - 3,250 rpm
Impact rate at no-load speed	0 - 48,500 bpm
In concrete	16 mm
In steel	12 mm
In wood	25 mm
Weight	1.8 kg

GSB 20-2 RE



HEAVY DUTY

Specifications

Rated Input Power	800 W
No-load Speed	0 - 1,100 / 3,000 rpm
Chuck Capacity	1.5-13 mm
Rated Speed	740 / 2 rpm
Rated Torque	5.2/2.0 Nm
Impact Rate	0-48,000 bpm
Weight	2.5 kg

Magnetic Drill

GBM 50-2



HEAVY DUTY

Specifications

Power	1,200 W
No-load Speed	50-255 / 100-510 rpm
Annular Cutter	Ø 50
Max. Twist Drill	Ø 23
Max Thread	M16
Magnetic Force	14,000 N
Weight	14.7 kg

SDS Plus Hammer

GBH 220



Specifications

Impact Energy	2 J
Power	720 W
No-load speed	0 - 2,000 rpm
Max. drilling concrete	22 mm
Mode	3 modes
Weight	2.3 kg

GBH 2-24 DRE



HEAVY DUTY

Specifications

Power Input	790 W
Impact Energy	2.7 J
In Concrete	4 - 24 mm
Rated Speed	0 - 920 rpm
Impact Rate	0 - 4,100 bpm
Mode	3 modes
Weight	2.8 kg

GBH 2-26 DRE



HEAVY DUTY

Specifications

Power Input	800 W
Impact Energy	2.7 J
In Concrete	4 - 26 mm
Rated Speed	0 - 900 rpm
Impact Rate	0 - 4,000 bpm
Mode	3 modes
Weight	2.7 kg

GBH 2-28 DFV



HEAVY DUTY

Specifications

Power Input	820 W
Impact Energy	3.2 J
In Concrete	28 mm
Rated Speed	0 - 1,300 rpm
Impact Rate	0 - 5,100 bpm
Weight	3.1 kg

GBH 3-28 DRE



HEAVY DUTY

Specifications

Power Input	800 W
Impact Energy	3.1 - 3.5 J
In Concrete	28 mm
Rated Speed	0 - 900 rpm
Impact Rate	0 - 4,000 bpm
Weight	3.6 kg

SDS Plus Hammer

GBH 4-32 DFR



HEAVY DUTY

Specifications

Power Input	900 W
Impact Energy	4.2 J
In Concrete	32 mm
Rated Speed	0 - 760 rpm
Impact Rate	0 - 3,600 bpm
Weight	4.7 kg

SDS Max Hammer

GBH 5-40 D



HEAVY DUTY

Specifications

Power Input	1,100 W
Impact Rate	1,500 - 2,900 bpm
Impact Energy	8.5 J
Drilling Dia. Concrete	12 - 40 mm
Rated Speed	170 - 340 rpm
Weight	6.8 kg

GBH 6-42 C



HEAVY DUTY

Specifications

Power Input	1,300 W
Impact Rate	0 - 3,100 bpm
Impact Energy	9 J
Drilling Dia. Concrete	12 - 42 mm
Rated Speed	0 - 360 rpm
Weight	7.7 kg

GBH 8-45 D



HEAVY DUTY

Specifications

Power Input	1500 W
Impact Rate	1,380 - 2,760 bpm
Impact Energy	12.5 J
Drilling Dia Concrete	12 mm - 45 mm
Rated Speed	150 - 305 rpm
Weight	8.5 kg

GBH 8-45 DV



HEAVY DUTY

Specifications

Power Input	1500 W
Impact Rate	1,380 - 2,760 bpm
Impact Energy	12.5 J
Drilling Dia Concrete	12 mm - 45 mm
Rated Speed	150 - 305 rpm
Weight	8.5 kg

Demolition Hammer

GSH 3 E



HEAVY DUTY

Specifications

Power Input	650 W
Impact Rate	0-3,500 bpm
Impact Force	2.6 J
Weight	3.7 kg

GSH 500

(Available in Hex and SDS Max)



HEAVY DUTY

Specifications

Power Input	1,100 W
Impact Energy - EPTA Value	7.8 J
Impact Rate	2,900 bpm
Auxiliary Handle	Straight Handle
Weight	5.6 kg

GSH 5



HEAVY DUTY

Specifications

Power Input	1,100 W
Impact rate	2,850 bpm
Impact Energy	7.5 J
Weight	5.6 kg

GSH 11 E



HEAVY DUTY

Specifications

Power Input	1,500 W
Impact Energy	16.8 J
Impact Rate	900-1,890 bpm
Vibration Value	18.5 m/s²
Weight	10.2 kg



Breaker

GSH 14 C



HEAVY DUTY

Specifications

Power Input	1,750 W
Impact Rate	1,900 - 1,950 bpm
Impact Force	28 J
Tool Holder	HEX 22 mm
Weight	14.6 kg

GSH 16-30



HEAVY DUTY

Specifications

Power Input	1,750 W
Impact Rate	1,300 bpm
Impact Force	41 J
Weight	16.5 kg

GSH 27 VC



HEAVY DUTY

Specifications

Power Input	2,000 W
Impact Rate	920 bpm
Impact Force	62 J
Weight	29.1 kg

4" Angle Grinder

GWS 700



Specifications

Rated input power	710 W
Voltage	220 - 240 V
No-load speed	12,000 rpm
Disc diameter	100 mm
Grinding spindle thread	M10
Weight	1.6 kg

GWS 750-100



HEAVY DUTY

Specifications

Rated Input Power	750 W
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10
Weight	1.8 kg

4" Angle Grinder

GWS 7-100 T



HEAVY DUTY

Specifications

Rated Input Power	720 W
No-load Speed	9,300 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10
Weight	1.8 kg

GWS 900-100



HEAVY DUTY

Specifications

Rated Input Power	900 W
Lockable Switch	2-way
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10

GWS 900-100 S



HEAVY DUTY

Specifications

Rated Input Power	900 W
Switch	Variable Speed
No-load Speed	2,800-11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10

GWS 9-100 P



HEAVY DUTY

Specifications

Rated Input Power	900 W
Switch	Paddle Switch
No-load Speed	11,000 rpm
Disc Diameter	100 mm
Grinding Spindle Thread	M10

5" Angle Grinder

GWS 12-125 S



HEAVY DUTY

Specifications

Rated Input Power	1200 W
Switch	Lockable Switch
No-load Speed	2,800 - 11,000 rpm
Disc Diameter	125 mm
Grinding Spindle Thread	M14

5" Angle Grinder

GWS 14-125 S



HEAVY DUTY

Specifications

Rated Input Power	1400 W
Switch	Lockable Switch
No-load Speed	2,800 - 11,500 rpm
Disc Diameter	125 mm
Grinding Spindle Thread	M14

GWX 14-125 (Xlock)



HEAVY DUTY

Specifications

Rated Input Power	1400 W
Switch	Lockable Switch
No-load Speed	11,000 rpm
Disc Diameter	125 mm
Grinding Spindle Thread	M14

7" Angle Grinder

GWS 2200-180



Specifications

Power Input	2,200 W
No-load speed	8,500 rpm
Spindle thread	M14
Disc Diameter	180 mm
Weight	5 kg

9" Angle Grinder

GWS 2200-230



Specifications

Power Input	2,200 W
No-load speed	8,500 rpm
Spindle thread	M14
Disc Diameter	230 mm
Weight	5 kg

Straight Grinder

GGG 3000L



Specifications

Power Input	300 W
Max. Collet Capacity	8 mm
No-load Speed	28,000 rpm
Weight	1.5 kg

Straight Grinder

GGG 30 LS



HEAVY DUTY

Specifications

Power Input	750 W
Max. Collet Capacity	8 mm
No-load Speed	33,000 rpm
Weight	1.5 kg

Bench Grinder

GBG 35-15



HEAVY DUTY

Specifications

Rated input power	350 W
Grinding wheel diameter	150 mm
Grinding wheel widths	20 mm
No-load speed	3,000 rpm
Grinding wheel bore	20 mm
Grit	24, 60
Weight	10 kg

GBG 60-20



HEAVY DUTY

Specifications

Rated input power	600 W
Grinding wheel diameter	200 mm
Grinding wheel widths	25 mm
No-load speed	3,600 rpm
Grinding wheel bore	32 mm
Grit	24, 60
Weight	15 kg

Marble Saw

GDC 140



HEAVY DUTY

Specifications

Rated input power	1,400 W
No-load speed	13,200 rpm
Cutting depth	35 mm
Disc diameter	115 mm
Weight	2.9 kg

Reciprocating Saw

GSA 120



Specifications

Input Power	1,200 W
Stoke Rate	0 - 3,000 spm
Stroke Length	29 mm
Blade Change :	SDS
Max. Cutting Depth in Wood	220 mm
In Steel Plate	20 mm
Weight	3.7 kg

AAC Block Cutter

GAC 250



Specifications

Input Power	1,200 W
No load chain speed:	12 m/s
Chain bar length:	335mm
Max. cutting capacity:	250mm
Autoclaved aerated concrete (AAC) cutter	
Weight incl. accessories:	4.7kg

Jigsaw

GST 750



HEAVY DUTY

Specifications

No-load Stroke rate	800 - 3,200 rpm
Rated input power	520 W
Saw, stroke length	20 mm
Bevel angle	-45° - 45°
Weight	2.29 kg

GST 90 BE



HEAVY DUTY

Specifications

Rated input power	650 W
Stroke length	26 mm
No-load Stroke rate	500 - 3,100 spm
Cutting capacity	
-In wood	90 mm
-In Alluminum	20 mm
-In Steel (unalloyed)	10 mm
Weight	2.6 kg

Circular Saw

GKS 130



HEAVY DUTY

Specifications

Rated input power	1300 W
Saw blade diameter	184 mm
No-load speed	6,380 rpm
Saw blade bore diameter	20 mm
Baseplate	290 x 150 mm
Guide rail compatible	no
Weight	3.9 kg

GKS 140



HEAVY DUTY

Specifications

Rated input power	1400 W
Saw blade diameter	184 mm
No-load speed	6,200 rpm
Saw blade bore diameter	20 mm
Baseplate	290 x 150 mm
Guide rail compatible	no
Weight	3.7 kg

Circular Saw

GKS 190



HEAVY DUTY

Specifications

Power Input	1,400 W
Blade Diameter	184 mm
Max. Cutting Capacities	
at 90°	67 mm
at 45°	48 mm
No-load Speed	5,500 rpm
Weight	4.1 kg

GKS 235 TURBO



HEAVY DUTY

Specifications

Power Input	2,050 W
Saw Blade Diameter	235 mm
Max. Cutting Capacities	
at 90°	85 mm
at 45°	65 mm
No-load Speed	0 - 5,300 rpm
Weight	7.6 kg

Mitre Saw

GCM 10 MX



HEAVY DUTY

Specifications

Power Input	1,700 W
Blade Size	254 mm
Arbour Size	25.4 mm
No-load Speed	4,800 rpm
Max Mitre	45° L / 52° R
Max. Cutting Capacity	89 x 89 mm
Weight	13.5 kg

Sliding Mitre Saw

GCM 254 D



NEW

Specifications

Power Input	1,800 W
Blade Size	254 mm
Arbour Size	25.4 mm
No-load Speed	4,800 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	89 x 226 mm
Weight	24.2 kg

Glide Mitre Saw

GCM 12 GDL



HEAVY DUTY

Specifications

Power Input	2,000 W
Blade Size	305 mm
Arbour Size	30 mm
No-load Speed	4,000 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	89 x 226 mm
Weight	32.1 kg

GBS 750 Professional

Belt Sander

NEW



WHY THIS

01

High removal rate

Cuts sanding time thanks to outstanding removal rate with 850 W motor system

02

Comfortable sanding

Comfortable to use with ergonomic grasping design and well-balanced 3.6 kg weight

03

Good dust experience

Keeps workspace clean and protects your lungs too, thanks to the higher dust pick-up rate

Outstanding removal efficiency ^{SP}

Excellent removal rate driven by powerful 850 W motor with acceptable sanding quality ensured by special designs

Comfortable sanding ^{SP}

Comfortable grasping design with well balanced weight and low vibration of 2.5 m/s²

Flexible for various applications

Speed regulation from 200 to 420 m/min, with compact design of 140 mm in width

Good dust experience ^{SP}

Good dust-pickup rate with durable dust bag



Hassle free consumable changing

Quick access to carbon brush and easy-to-change sanding belt

TARGET USERS

Cabinet Installer & Carpenter | Framer & Roofer / Rough Carpenter



GBS 750 Professional	Unit	Specifications
Rated power input	W	850
No-load belt speed	m/min	200-420
Sanding belt length	mm	533
Sanding belt width	mm	75
Belt speed preselection	—	Yes
Self-generated/external dust extraction connection	—	Yes
Weight	kg	3.6

GRW 140 Professional

Mixer

NEW



WHY THIS

01

Mix faster

Faster and effortless mixing of large volumes thanks to high-performance 1,400 W motor

02

Comfortable mixing

Comfortable mixing with less strain over long periods thanks to ergonomic wheel-shaped handle

03

Easy maintenance

Saves time and maintenance with carbon brush LED lifespan indicator

Constant Speed

Motor speed and tool output power remain constant, bringing optimized motor efficiency

1,400 W Power Input ^{SP}

1,400 W powerful motor makes mix high density material at ease

On/off Switch With Lock On Button

Button is locked on at switch on mode, users don't have to keep pressing the button while mixing

Soft Start

Speed increases gradually when turn on the tool to prevent material splashes out and protect users' safety

Carbon Brush Indicator ^{USP}

Alert the user by blinking in red color when carbon brush is at 95% usage

Easy Change Carbon Brush

Designed to change the carbon brush at ease that users can do by themselves

Wheeled Shaped Handle

Easier handling the tool with better balance and stable when mixing

2 Speed Selection

2 speeds are provided for mixing different materials



TARGET USERS

Drywall & Plasterer | Masonry & Restoration | General contractor | Painter | Tiler



GRW 140 Professional	Unit	Specifications
Input power	W	1,400
No-load speed	rpm	480 / 750
Max. torque	Nm	35 / 23
Tool holder	—	M14
Max. stirrer basket diameter	mm	140
On/off switch	—	Lock on
Weight (w/o AC)	kg	4.2

Table Saw

GTS 254



Specifications

Power Input	1,800 W
Blade Size	254 mm
Arbour Size	30 mm
No-load Speed	4,300 rpm
Max Mitre	45° L / 45° R
Max. Cutting Capacity	555 x 555 mm
Weight	24.4 kg

GTS 10 J



HEAVY DUTY

Specifications

Power input	1,800 w
Saw Blade Diameter	254 mm
Table Size	642 x 549 mm
Bevel Setting	47° L / 2 ° R
Cutting capacity	
Right	625 mm
Left	255 mm
Weight	27 kg

GTS 10 XC



HEAVY DUTY

Specifications

Power input	2,100 w
Saw Blade Diameter	254 mm
Table Size	640 x 705 mm
Bevel Setting	47° L / 1 ° R
Cutting capacity	
Right	635 mm
Left	250 mm

Table Saw Stand

GTA 60 W



HEAVY DUTY

Specifications

Height	622 mm
Length of work bench	1,220 mm
Dimensions of table when folded up	1220 x 740 x 510 mm

Cut-off Saw

GCO 230

NEW



Specifications

Power Input	2,300 W
No-load Speed	4,100 rpm
Disc Diameter	355 mm
Cutting Capacity	
Square Bar	☐ 120 x 120 mm
Round Pipe	☐ 129 mm
Rectangle	☐ 100 x 200 mm
L-profile	☐ 137 mm
Weight	13.5 kg

Cut-off Saw

GCO 14-24 J



HEAVY DUTY

Specifications

Power Input	2,400 W
Saw Blade Diameter	355 mm
Saw Blade Bore	25.4 mm
No-load Speed	3,800 rpm
Cutting Capacity	100 x 196 mm
	119 x 119 mm
	130 x 130 mm
Weight	18.1 kg

Cold cut-off Saw

GCD 12 JL



HEAVY DUTY

Specifications

Power Input	2,000 W
No-load speed	1,500 rpm
Saw Blade Diameter	305 mm
Cutting capacity at 45° mitre	85 mm x 85mm
Cutting capacity at rectangle 0°	158 x 80 mm
Cutting capacity at square 0°	100 x 100 mm
Cutting capacity at L-profile 0°	110 x 110 mm
Weight	20 kg

Trimmer

GKF 550



HEAVY DUTY

Specifications

Power Input	550 W
No-load Speed	33,000 rpm
Bix Size	6 mm / 1/4"
Weight	1.4 kg

Multi-cutter

GOP 30-28



HEAVY DUTY

Specifications

Power Input	300 W
No-load oscillation	8,000 ~ 20,000 opm
Oscillation angle on left and right	1.4 °
Weight	1.5 kg

Plunge Router

GOF 130



HEAVY DUTY

Specifications

Power	1,300 W
No-load speed	11,000 - 28,000 rpm
Bit Holder	6 - 8.0 mm
Plunge depth	55 mm
Weight	3.5 kg

Planer

GHO 6500



HEAVY DUTY

Specifications

Power Input	650 W
No-load Speed	16,500 rpm
Adjustable Chip Thickness	0 - 2.6 mm
Adjustable Rebating Depth	0 - 9 mm
Weight	2.8 kg

GHO 10-82



HEAVY DUTY

Specifications

Power Input	710 W
Planing width	82 mm
Planing depth	0 - 1 mm
Adjustable rebating depth	0 - 9 mm
No-load speed	16,500 rpm
Weight	2.5 kg

Belt Sander

GBS 750



NEW

Specifications

Power Input	850 W
No-load belt speed	200-420 m/min
Sanding belt length	533 mm
Sanding belt width	75 mm

Orbital Sander

GSS 140



HEAVY DUTY

Specifications

Power Input	220
No-load Speed	14,000 rpm
No-load Orbital Stroke Rate	28,000 min-1
Orbital Diameter	1.5 mm
Sanding Sheet Dimension	114 x 140 mm
Sanding Plate Dimension	101 x 112 mm
Weight	1.2 kg

GSS 140 A

(with Dust Bag)



HEAVY DUTY

Specifications

Power Input	220W
No-load Speed	14,000 rpm
No-load Orbital Stroke Rate	28,000 min-1
Orbital Diameter	1.5 mm
Sanding Sheet Dimension	114 x 140 mm
Sanding Plate Dimension	101 x 112 mm
Weight	1.2 kg

Orbital Sander

GSS 2300



Specifications

Power input	190 W
No-load speed	12,000 rpm
No-load orb. stroke	24,000 opm
Oscillating circuit dia.	2 mm
Sanding plate	92 mm x 182 mm

Random Orbit Sander

GEX 125



NEW

Specifications

Power Input	280W
No-load Speed	7,500 ~ 12,000 rpm
No-load Orbital Stroke Rate	15,000 ~ 24,000
Orbit Diameter	2.6 mm
Sanding pad diameter	125mm
Weight	1.4 kg

GEX 125-1AE



HEAVY DUTY

Specifications

Power Input	250 W
No-load Speed	7,500 - 12,000 rpm
Oscillating Circuit	
Diameter	2.5 mm
Orbit Rate	15,000 - 24,000 opm
Sanding Plate	125 mm
Weight	1.3 kg

Mixer

GRW 140



NEW

Specifications

Power Input	1,400W
Voltage	230V
No-load Speed	750 rpm
Max. Torque	10.0 / 7.0 Nm
Weight	4.2 kg

Drywall Sander

GTR 550



Specifications

Rated input power	550 W
No-load speed	340 ~ 910 rpm
Sanding pad dia.	215 mm
Sanding pad type	One pad + Intermediate pad
Tool Height	210 mm
Width	250 mm
Length	1,730 mm

Polisher

GPO 950



HEAVY DUTY

Specifications

No-load speed	600 2,100 rpm
Rated input power	950 W
Grinding spindle thread	M14
Polishing sponge, diameter	180 mm
Tool dimensions (width)	118 mm
Tool dimensions (length)	325 mm
Tool dimensions (height)	224 mm
Weight	2.3 kg

GPO 12 CE



HEAVY DUTY

Specifications

Power Input	1,250 W
No-load Speed	750 - 3,000 rpm
Polishing Disc Diameter	180 mm
Thread of Polishing Spindle	M14
Tool Length	450 mm
Weight	2.5 kg

Heat Gun

GHG 18-60



HEAVY DUTY

Specifications

Rated input power	1,800 W
Working temperature	50 - 600 °C
Airflow	250 - 600 l/min
Control, airflow	3-stage

GHG 20-63



HEAVY DUTY

Specifications

Rated input power	2,000 W
Working temperature	50 - 630 °C
Airflow	150 - 500 l/min
Control, airflow	3-stage
Digital display	Yes

Blower

GBL 650



NEW

Specifications

Power Input	650 W
No-load Speed	16,000 rpm
Air Flow Rate	3.7 m3/min
Weight	1.4 kg

Blower

GBL 82-270



Specifications

Rated input power	820 W
Weight	2.25 kg
Volumetric flow rate	4.5 m³/min
No-load speed	16,000 rpm

Vacuum

GAS 15



Specifications

Rated input power	1,100 W
Container (gross/net)	15 / 10 litre
Airflow rate	53 l/s
Vacuum pressure	270 mbar
Weight	6 kg

GAS 12-25 PL



Specifications

Rated input power	1,250 W
Container (gross/net)	25 / 21 litre
Airflow rate	65 l/s
Vacuum pressure	200 mbar

GAS 400 A



Specifications

Rated input power	1,200 W
Container (gross/net)	28 / 40 L
Airflow rate	80 l/s
Vacuum pressure	240 mbar
Weight	14 kg



DUST FREE SOLUTION



DUST CUP

For GSB & GBH
Holes 4-36mm
Works w/o vacuum



GDE 24

For GSB & GBH
Holes 4-26 mm
Work with / without vacuum



GDE 18V-16

For GBH 187-LI and GBH 18V-28 CF
Holes 4 – 16 mm
Self-vacuum



GDE 12

Dust Extractor for GBH 185-LI
Max. Drilling depth 100 mm
Auto-power; HEPA Filter;
Bit target; LED light



GDE 68

For GSB & GBH
Holes or core cutter 4 – 68 mm



GDE 16 plus

For GSB, GBH & GBM
50 mm collar tool,
Holes 4-16 mm



GDE MAX

For GSH, chiselling
Max. Length 600 mm



GDE HEX

For GSH, breaking



GDE 125 EA-T

For GWS Series
Disc 125 mm
Max cut. depth 25 mm



GAS 400 A Professional

Wet and Dry Vacuum



WHY THIS

01

Continuous, strong suction power

Bosch own inclusive Automatic Filter Cleaning (AFC) technology keeps filter clog-free with high airflow consistency to help you get job done faster

02

Easier dust dumping

Emptying dust container is quicker and easier thanks to hose-less container design and standalone, anti-tipping motor head

03

Compact storage

Saves storage and makes lifting easier with the integral hose storage design

Most compact storage ^{USP}

- Saves storage room and makes lifting easier thanks to integral hose storage design
- Highly convenient – you can transport the vacuum cleaner and your tools in one go thanks to L-Boxx compatible system



Effortless transportation possible

Telescopic handle optional with extra purchase

^{USP} Continuous strong suction power

- Continuous strong suction power ups productivity with Bosch own inclusive Automatic Filter Cleaning (AFC) technology
- Different applications possible with two AFC modes

"A" - Automatic mode: 2 cleaning strokes every 15 seconds
"M" - Manual mode: 2 cleaning strokes for each button click



Basic protection

- Basic protection against dust penetration thanks to L-Class certified system
- Anti-static shock protection provided by the conductive adapter and hose system



Easy dust dumping ^{SP}

- Well protected from tipping over during dust dumping due to standalone motor head design
- No more hose removal during dust dumping and offers a super-clean container with the hose-less container design

TARGET USERS

General construction | Carpenter | Electrician | HVAC | Drywaller | Painter



GAS 400 A Professional	Unit	Specifications
Input power	W	1,200
Container gross volume	L	40
Container net volume (dry)	L	28
Max. airflow (at turbine)	l/s	80
Max. vacuum pressure (at turbine)	Kpa	24
Hose diameter and length	mm*m	Ø 28*4
Power cord length	m	7
Weight	kg	14.0

GBH 6-42 Professional

Rotary Hammer with SDS max



WHY THIS

01

Top-level protection

2-in-1 hammer with mechanical (safety clutch, vibration damped handle) & electronic (KickBack Control, Rest & Vibration Reminder) solutions to protect user health

02

Ease of use

New first-in-class user interface and Connectivity App that helps you to control the tool and select the operation mode you need

03

Stress-free maintenance

Brushless motor & Auto Gear Rotation system reduce regular maintenance & tool downtime

Superior performance

An improved impact mechanism and highly capable drive train lead to high performance ≥ 9 J impact energy

9.0 J	3100 bpm	1300 W
-------	----------	--------



^{USP} Simplify tough work (smart tool control)

- Bluetooth connectivity for personalization via App
- User Interface for real-time tool status
- Working mode choice via User Interface
- Customized soft start
- Signal switch for variable rotation speed
- Preventive maintenance



^{USP} Keep the PROs fit (minimized arm injuries)

- KickBack Control will automatically stops the tool when there is sudden kickback
- Effective vibration control (damped handle)
- Vibration reminder protects from Hand-Arm Vibration Syndrome (HAVS)
- Rest reminder maintains a healthy balance between working and rest



Outstanding reliability ^{USP}

- Brushless technology (BLAC) with Auto Gear Rotation (AGR) for a long-lasting tool
- Maintenance reminder prevents unexpected down-time



TARGET USERS

General Contractor | Civil Engineering | HVAC Electrician



GBH 6-42 C Professional	Unit	Specifications
Input power	W	1,300
Impact energy	J	9.0
Impact rate	bpm	0-3,100
Rated tool speed	rpm	0-360
Max. drilling Ø concrete	mm	42
Vibration drilling / chiselling	m/s ²	14.1 / 9.5
Tool holder	—	SDS-Max
Weight	kg	7.7



PROFESSIONAL HAND TOOLS

PROFESSIONAL HAND TOOLS

6 pc SL / PH Screwdriver Set	1600A016BF
6 pc Torx Screwdriver Set	1600A01V09
6 pc SL/PH/TX/PZ Screwdriver Set	1600A02CV3
PH1 x 100 mm Screwdriver	1600A01TG2
PH2 x 125 mm Screwdriver	1600A01TG3
PZ2 x 125 mm Screwdriver	1600A01V08
SL3.5 x 75 mm Screwdriver	1600A01TF8
SL4.5 x 100 mm Screwdriver	1600A01TF9
SL5.5 x 100 mm Screwdriver	1600A01TG0
SL6.5 x 125 mm Screwdriver	1600A01TG1
TX10 x 75 mm Screwdriver	1600A01V0A
TX15 x 75 mm Screwdriver	1600A01V0B
TX20 x 100 mm Screwdriver	1600A01V0C
TX25 x 100 mm Screwdriver	1600A01V0D
TX30 x 125 mm Screwdriver	1600A01V0E
TX40 x 125 mm Screwdriver	1600A01V0F
160 mm Diagonal Cutter	1600A01TH9
200 mm Long Nose Pliers	1600A01TH8
180 mm Combination Pliers	1600A01TH7
Wire Stripper	1600A01V03
3 pc Plier Set	1600A016BG
5m Tape Measure	1600A016BH
8m Tape Measure (Autolock)	1600A01V3S
10 pc Utility Blade Set	1600A016ZH
50 pc Utility Blade Set in Dispenser	1600A01V3J
Retractable Utility Knife	1600A01V3H

Folding Knife	1600A016BL
18 mm Snap-Off Knife	1600A01TH6
Knife Set (Folding Knife & Snap-off Knife)	1600A016BM
3 pc Knife Set (Folding, Retractable & Snap-off)	1600A027M4
Knife & Blades Set	1600A027M5
25 cm Level (magnetic)	1600A016BN
60 cm Level	1600A016BP
120 cm Level	1600A016BR
60 cm Box Level (slim)	1600A01V3Y
120 cm Box Level (slim)	1600A01V3Z
Hammer	1600A016BT
10 pc Spanner Set	1600A02AU0
5 pc Spanner Set	1600A02Z3D
Hex Key Set	1600A01TH5
Torx Key Set	1600A01TH4
13 pc Hand Tool Set	1600A027M3
Plier & Mixed Hand Tools Set in L-Boxx 102	0615990N2S
Screwdriver & Mixed Hand Tools Set in L-Boxx 102	0615990N2R
GSR12V-15 and Hand Tools in L-Boxx 102*	060186810R
GWT20 & Hand Tools Set	1600A02H5B
Toolbelt & Hand Tools Set	1600A02H5C
Folding Knife Counter Top Display (14x)	1600A02YA9
Retractable Knife Counter Top Display (16x)	1600A02YB0
Blade Dispenser (50pc) Counter Top Display (10x)	1600A02YB1
8m Tape Measure Counter Top Display (8x)	1600A02YB2
5m Tape Measure Counter Top Display (8x)	1600A02YB3

*Exclusive for all Multiples

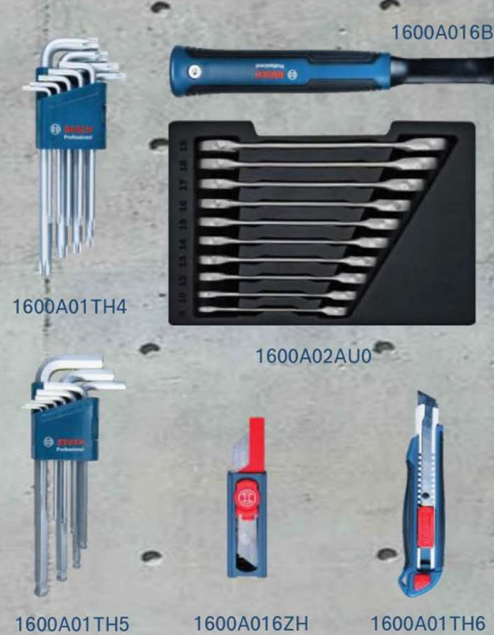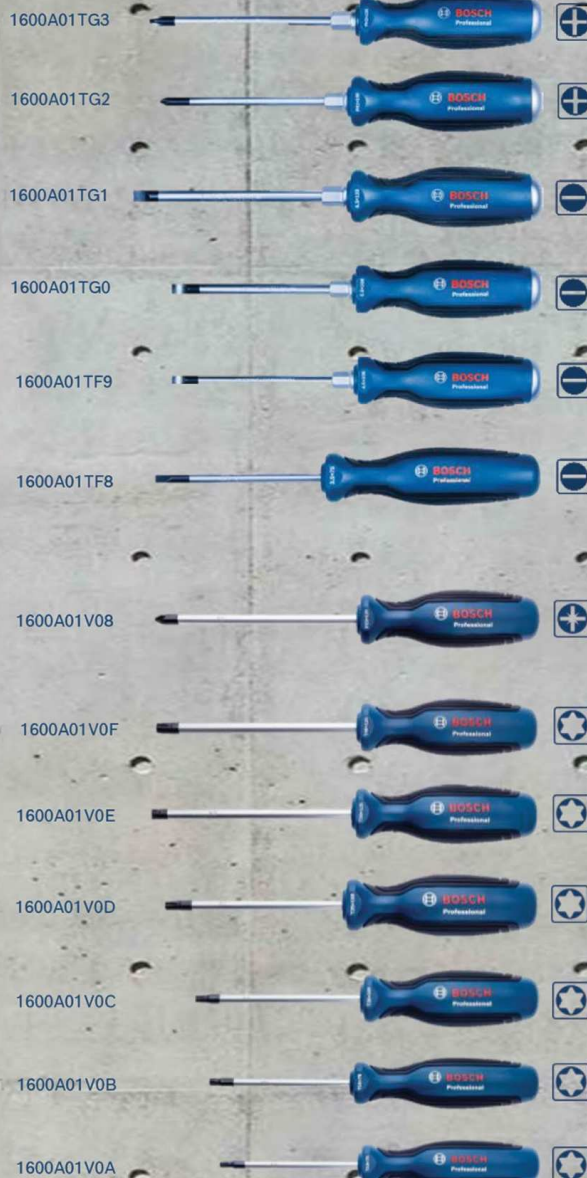

PROFESSIONAL VDE HAND TOOLS

VDE Screwdriver PH 1 x 100mm	1600A02NB8
VDE Screwdriver PH 2 x 125mm	1600A02NB9
VDE Screwdriver SL 2.5 x 75mm	1600A02NC0
VDE Screwdriver SL 3.5 x 75mm	1600A02NC1
VDE Screwdriver SL 4.5 x 100mm	1600A02NC2
VDE Screwdriver SL 5.5 x 100mm	1600A02NC3
VDE Screwdriver SL 6.5 x 125mm	1600A02NC4
VDE Screwdriver TX 10 x 75mm	1600A02NC5
VDE Screwdriver TX 15 x 75mm	1600A02NC6
VDE Screwdriver TX 20 x 100mm	1600A02NC7
VDE Screwdriver TX 25 x 100mm	1600A02NC8
VDE Screwdriver TX 30 x 125mm	1600A02NC9
VDE Screwdriver TX 40 x 125mm	1600A02ND0
VDE Screwdriver PZ 1 x 100mm	1600A02ND1
VDE Screwdriver PZ 2 x 125mm	1600A02ND2
VDE Screwdriver PZ 3 x 125mm	1600A02ND3
VDE Screwdriver SL / PH 1 x 100mm	1600A02ND4
VDE Screwdriver SL / PH 2 x 125mm	1600A02ND5
VDE Screwdriver SL / PZ 1 x 100mm	1600A02ND6
VDE Screwdriver SL / PZ 2 x 125mm	1600A02ND7
Single pole phase tester SL 3 x 75mm	1600A02ND8
VDE Spanner 8mm	1600A02NE9


VDE Spanner 10mm	1600A02NF0
VDE Spanner 13mm	1600A02NF1
VDE Spanner 17mm	1600A02NF2
VDE Spanner Set 4pc	1600A02NE8
VDE Socket wrench set 6pc (hex)	1600A02NF3
VDE Screwdriver Set SL/PH 7pc	1600A02NF7
VDE Screwdriver Set TX 7pc	1600A02NF8
VDE Screwdriver Set Mixed 14pc	1600A02NF9
VDE Diagonal Side Cutter 160mm	1600A02ND9
VDE Combination Plier 180mm	1600A02NE1
VDE High Leverage Diagonal Side Cutter 200mm	1600A02NE2
VDE Long Nose Plier straight 200mm	1600A02NE3
VDE Long Nose Plier bent (40°) 200mm	1600A02NE4
VDE Waterpump Plier 250mm	1600A02NE5
VDE Crimping Plier 180mm	1600A02NE6
VDE Universal wire stripper 160mm	1600A02NE7
VDE Cable Shear 200mm	1600A02NF4
VDE Plier Set 3pc	1600A02NG0
VDE Plier Set 4pc	1600A02NG1
VDE Cable Knife 200mm	1600A02NF5
VDE Dismantling Knife 200mm	1600A02NF6
VDE Mixed Set 5pc	1600A02NG2
VDE Mixed Set 7pc	1600A02NG3
Mixed Hand Tools case 37pc	1600A02NG4

PROFESSIONAL SANITARY HAND TOOLS

Sanitary water pump pliers 250mm	1600A02W3N
Sanitary pliers wrench 250mm	1600A02W3R
Sanitary corner pipe wrench 45° 420mm	1600A02W3T
Sanitary corner pipe wrench 90° 420mm	1600A02W3V



SEE FULL RANGE HERE!

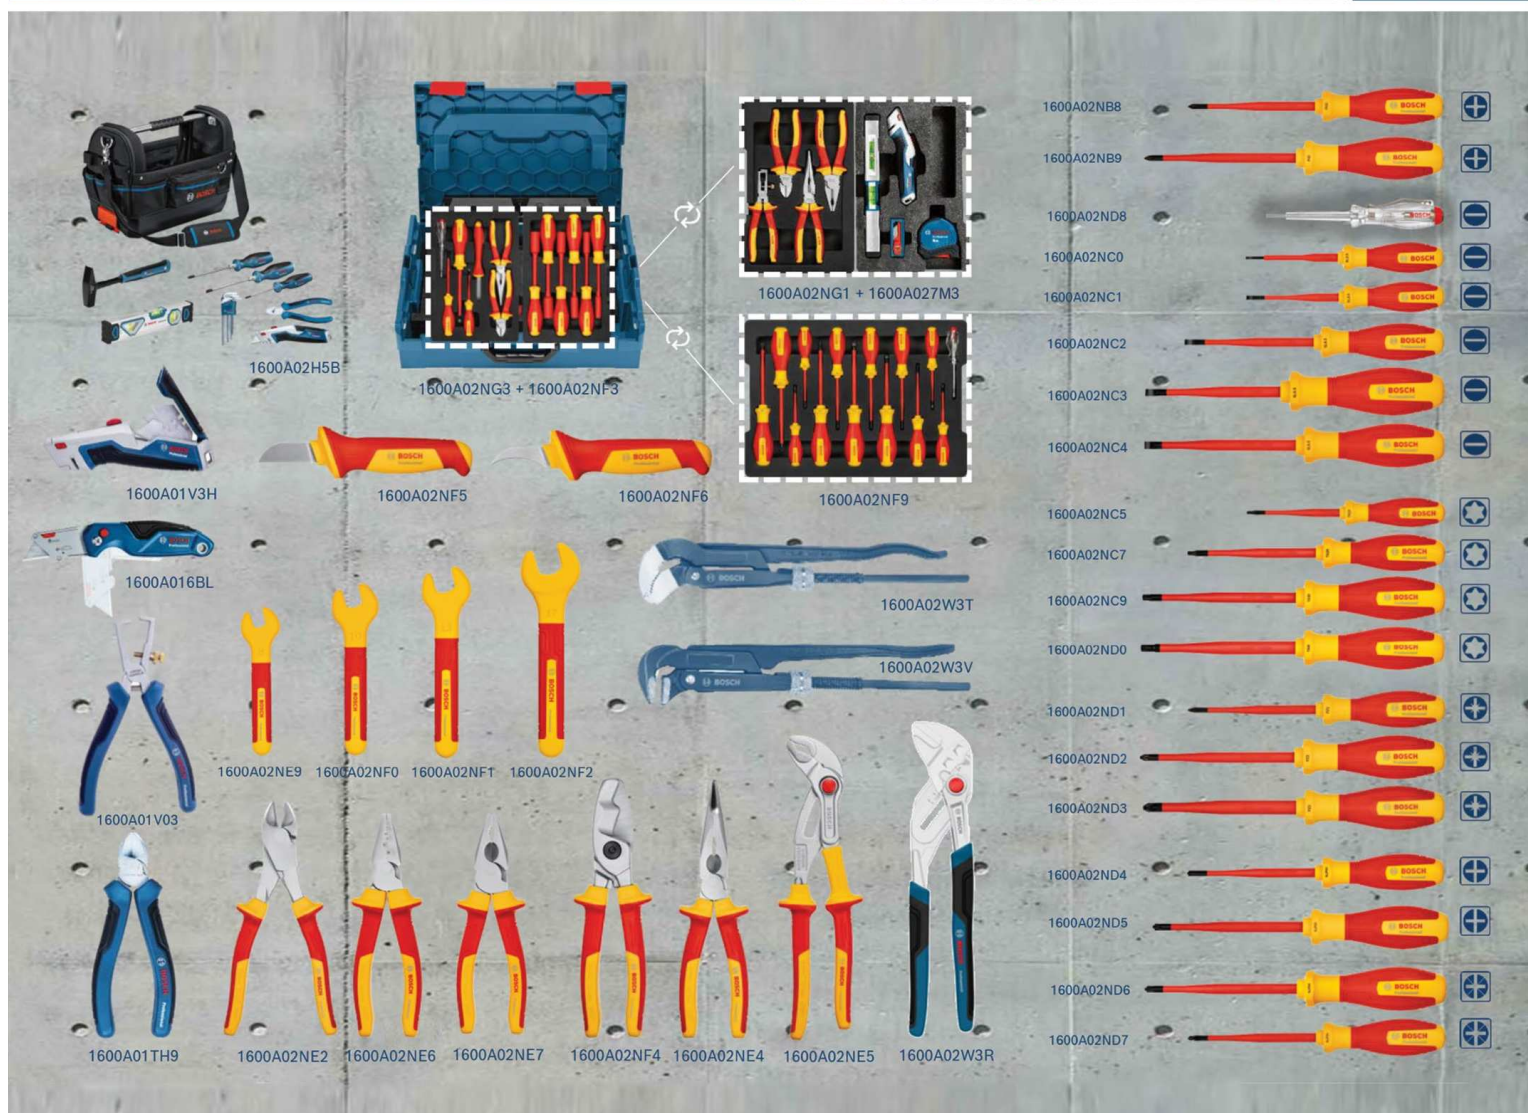




BOSCH



Home
made by
you.

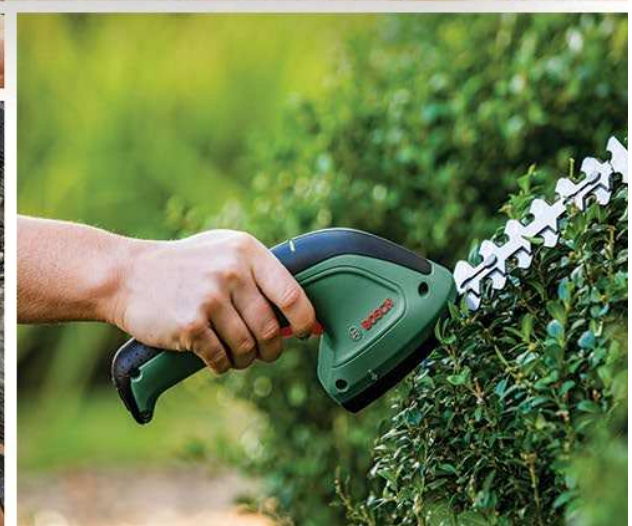

DIY TOOLS

Cordless Cleaning Brush

Universal Brush



3.6 V/1.5 Ah integrated Li-ion Battery
Run time (mins) 45
No-load speed (rpm) 215
IP protection type: IPX5
Easy-to-click accessory system
Scope of Supply:
Bristle brush, Detailed brush, Pad holder, Microfibre non-scratch pad, Abrasive heavy-duty pad, Micro USB cable

Cordless Cleaning Brush Accessories

Bristle Brush



For heavy duty cleaning on a wide range of surfaces around the home.
1 piece included in carton packaging

Detailed Brush



Ideal for scrubbing in hard to reach areas, for example when cleaning taps and plugholes.
1 piece included in carton packaging

Pad Holder



Holder to mount cleaning pads on to the machine.
1 piece included in carton packaging

Cordless Cleaning Brush Accessories

Microfibre non-scratch pad



Designed for use on surfaces that you don't want to be marred by abrasives.
3 pieces included in carton packaging

Abrasive heavy duty pad



Suitable for the toughest cleaning applications and for removing rust.
3 pieces included in carton packaging

Kitchen scour pad



Embedded abrasives help to break up tougher dirt and grime.
3 pieces included in carton packaging

Melamine Eraser pad



Easy wet and dry cleaning on smooth surfaces and glass.
3 pieces included in carton packaging

Cordless Air Pump

EasyPump



3.6 V/3.0 Ah integrated Li-ion battery
Max. pressure (bar) 10.30
Max. pressure (psi) 150
Max. pressure (kpa) 1,030
Max. output volume (l/min) 10
Hose length (m) 0.2
Scope of Supply:
Valve adapters: Ball needle, French valve, Balloon adapter, Micro USB cable, Textile bag

Glue Gun

PKP 18 E



Power (w) 200
Gluing capacity (g/min) 20
Glue stick diameter (mm) 11
Glue stick length (mm) 45-300
Max. preheat time (min) 7
Melting temperature (°C) 200
Scope of Supply:
1 x glue stick, Extra-long nozzle

Glue Pen



3.6 V/1.5 Ah integrated Li-ion battery
Gluing capacity (g/min) 2
Glue stick diameter (mm) 7
Glue stick length (mm) 150
Max. preheat time (sec) 15
Melting temperature (°C) 170
Max. working time: 30min / 6 sticks
Scope of Supply:
4 x glue sticks, Micro USB charger

PKP 3.6 LI



3.6 V/1.5 Ah integrated Li-ion battery
Gluing capacity (g/min) 2
Glue stick diameter (mm) 7
Glue stick length (mm) 150
Max. preheat time (sec) 15
Melting temperature (°C) 170
Max. working time: 30min / 6 sticks
Scope of Supply:
4 x glue sticks, Micro USB charger

Head Lamp

Head Lamp



3x AAA, 1.5 Ah batteries – not included
Brightness (lm) 190
Lighting levels: H-190lm, L-55lm, Strobe
Lighting time H-3.5h; L-15h; S-8h
Illumination distance (m) Wide/H-28, L-14
LED type White COB LED
Watertightness IPX4 (splashproof)
Angle adjustment 60°
Lamp dimensions (mm) L62*W46*H42
Band Dimensions
Lamp Weight (kg) 0.058



IXO COLLECTIONS

IXO 7 with SPICE mill



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box

IXO 7 with BBQ blower



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box

IXO 7 with VINO corkscrew



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box

IXO 7 with universal cutter



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box



IXO 7 with torque setting screw



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box

IXO 7 with drilling screw



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box

IXO 7 with angle screw



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box

IXO 7 with off-set angle screw



3.6 V/2.0 Ah integrated Li-ion battery
No-load speed (rpm) 235
Max. torque for soft/hard (Nm) 3 / 5.5
Charging time (h) 3
Screw Diameter (mm) 5
Scope of supply:
10 standard screwdriver bits, Magnetic Bit Holder, Micro USB cable, Storage box



6 MONTHS WARRANTY



OUTDOOR AND GARDEN

High Pressure Washers

EasyAquatak 100 360° Gun



Motor Power (W)	1,100
Max. Pressure (bar)	100
Max. Flow Rate (l/h)	270
Max. Flow Temp (°C)	40
Hose (m)	3 PVC
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	3
Scope of Supply:	
Bosch 360° high pressure gun (with nozzle: 20/80° variable fan), 3 m high pressure hose, High pressure detergent nozzle (450 ml), Water filter (black)	

EasyAquatak 100 Long Lance



Motor Power (W)	1,100
Max. Pressure (bar)	100
Max. Flow Rate (l/h)	270
Max. Flow Temp (°C)	40
Hose (m)	3 PVC
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	3
Scope of Supply:	
Bosch high pressure gun, Lance, 3 m high pressure hose, Variable fan jet nozzle, Water filter (black)	

EasyAquatak 110 Long Lance



Motor Power (W)	1,300
Max. Pressure (bar)	110
Max. Flow Rate (l/h)	330
Max. Flow Temp (°C)	40
Hose (m)	3 PVC
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	3
Scope of Supply:	
Bosch high pressure gun, Lance, 3 m high pressure hose, Variable fan jet nozzle, Rotary nozzle, High pressure detergent nozzle (450 ml), Water filter (black)	

EasyAquatak 120 Long Lance



Motor Power (W)	1,500
Max. Pressure (bar)	120
Max. Flow Rate (l/h)	350
Max. Flow Temp (°C)	40
Hose (m)	5 PVC
Self-priming Cable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	5
Scope of Supply:	
Bosch high pressure gun, Lance, 5 m high pressure hose, Variable fan jet nozzle, Rotary nozzle, High pressure detergent nozzle (450 ml), Water filter (black)	

High Pressure Washers

UniversalAquatak 125



Motor Power (W)	1500
Max. Pressure (bar)	125
Max. Flow rate (L/h)	360
Max. Flow temp (°C)	40
Hose (m)	5 PVC
Self-priming Capable	Yes
Voltage (V)	230 / 240
Frequency (Hz)	50 / 60
Cable length (m)	5
Scope of Supply:	
Bosch high pressure gun, Lance, 5m high pressure hose, 3-in-1 nozzle, High pressure foam nozzle, 450 ml Water filter (clear)	

UniversalAquatak 130



Motor Power (W)	1700
Max. Pressure (bar)	130
Max. Flow rate (l/h)	420
Max. Flow temp (°C)	40
Hose (m)	6 PVC
Self-priming Capable	Yes
Voltage (V)	230 / 240
Frequency (Hz)	50 / 60
Cable length (m)	6
Scope of Supply:	
Bosch high pressure gun, Lance, 6m high pressure hose, 3-in-1 nozzle, High pressure foam nozzle, 450 ml Water filter (clear)	

AdvancedAquatak 140



Motor Power (W)	2,100
Max. Pressure (bar)	140
Max. Flow Rate (l/h)	450
Max. Flow Temp (°C)	40
Hose (m)	8 PU
Self-priming Capable	Yes
Voltage (V)	220 / 240
Frequency (Hz)	50 / 60
Cable Length (m)	8
High Pressure Hose Reel	Yes
Motor Type	Induction
Scope of Supply:	
Bosch high pressure gun, Lance, 8m high pressure hose, Variable fan jet nozzle, Rotary nozzle, High pressure foam nozzle (550 ml), Water filter (clear)	

HPW Accessories

360 Degree Gun



360° Pistol for EasyAquatak 100
Full rotation and variable nozzle
450 ml capacity detergent accessory
Simple push-fit connections



HPW Accessories

Nozzle 3-in-1



Adjustable nozzle
High pressure fan blasts away dirt
Rotary jet removes stubborn dirt
Low pressure for soap option

Rotary Nozzle



Powerful oscillating head
Removes tough dirt
Rotary jet for powerful cleaning

90 Degree Nozzle



90° nozzle
For cleaning under car wheel arches
Remove dirt build up in gutters

Vario Fan Jet Nozzle



Adjustable nozzle
Fan jet for rinsing and general cleaning
Pencil jet for concentrated power to remove stubborn dirt

HPW Accessories

Trio Nozzle



Adjustable nozzle
High pressure fan blasts away dirt
Rotary jet removes stubborn dirt
Pencil jet for concentrated power to remove stubborn dirt

Suction Nozzle



Perfect for emptying rain water, removing flood water or cleaning up after washing the car or patio
Minimum suction flow 50 ltr/min

450 ml Foam Nozzle



Applies detergent quickly and evenly
Connects easily to the lance
450 ml capacity detergent bottle

Water Filter



Fits directly on water inlet
Easy to remove and clean

HPW Accessories

High Pressure Hose 6 m



Resists twisting in use
Quick connect SDS fittings
9.5 mm hose diameter, 6 m length
Material : PVC (Polyvinyl Chloride)
For use with a pressure of up to 135 bar

Extension Hose 6 m



Additional 6 m in hose length
Resists twisting in use
Quick connect SDS fittings

Drain Cleaner 10 m



Jets propels the nozzle forward
10 m length

High Pressure Self Priming Kit



Enables you to draw clean water from water source other than a tap
Reinforced for added durability

HPW Accessories

Compact Brush



Fan jet nozzle with lance extension
Brush skirt to reduce splashback
Easy push-fit connections
L 152 X W 96 X H 104 mm

Car Cleaning Kit



Set includes:
90 Degree Nozzle for hard to reach areas
Low-pressure brush can be used with detergent
Extension hose and microfibre cloth

Home & Car Kit



Set includes:
90 Degree Nozzle for hard to reach areas
Low-pressure brush can be used with detergent
AquaSurf 250 Patio Cleaner

360 Cleaning Kit



Set includes:
360° Pistol for full rotation of nozzle
Extension hose and microfibre cloth

Hedge Trimmer

UniversalHedgeCut 50



Motor Power (w) 480
No load stroke rate (spm) 3,400
Blade length (cm) 50
Tooth opening(mm) 26
Sound power level (dB(A)) 91
Weight (kg) 3.5
Scope of Supply:
Diamond ground blade, 50cm
Knife cover

Cordless Pruner

EasyPrune



3.6 V/1.5 Ah integrated Li-ion battery
Max. cut diameter (mm) 25
Max. cut performance: Up to 450 cuts per charge
POWER ASSIST SYSTEM
Scope of Supply:
Micro USB cable

EasyPrune Blade



Replacement blades -stainless steel, bypass blades

Cordless Shear

EasyShear



3.6 V/1.5 Ah integrated Li-ion battery
No-load runtime (mins) Up to 40
Max. area cut performance: 22sqm per charge
Scope of Supply:
Grass shear blade (mm) 80
Shrub shear blade(mm) 120
Micro USB cable

Cordless Shrub and Grass Shear Accessories

80mm Grass Shear Blade



Replacement blades 80mm - Swiss-made, laser cut
diamond ground blades

120mm Shrub Shear Blade



Replacement blades 120mm - Swiss-made, laser cut
diamond ground blades

Hand Mower

AHM 38G



5 blade cylinder cutting system
Hardened steel blades
Height-of-cut (mm) 15-43
Width-of-cut(cm) 38
Tool-free setting of blade
Hand push
Scope of Supply:
Grass collection box

Leaf Blower/ Vacuum

UniversalGardenTidy 3000



Motor Power (w) 1600 - 3000
Blower Airflow (km/h) 165-285
Vacuum Flow rate max (l/s) 160
Shredding Ratio 12:1
Collection Bag (L) 50
Weight (Blow / Vac): 3.4 / 4.7kg
Scope of Supply:
Blow nozzle and vacuum tube,
Shoulder support strap,
Large collection bag



6 MONTHS WARRANTY



**BOSCH**

BOSCH AUTHORIZED SERVICE CENTERS

D.L. ELECTRONICS SERVICE CENTER

#65 Decidar Bldg. Lower
Bonifacio Street, Baguio, Benguet 2600
T: +63 74 661 9438
E: boschbaguiuhub@gmail.com

D.L. ELECTRONICS SERVICE CENTER

Coastway Complex, Arellano Bani
Dagupan City 2400
M: +63 945 730 4673
E: dlbaguio@yahoo.com

DAU-AGRI IND'L CORP.

Dau Access Road Nlex, Highway,
Dau Mabalacat City, Pampanga 2010
T: +63 45 458 2941
E: dauagrii@gmail.com

MALIBANGA ENTERPRISES

346-C Alabang Zapote Road,
Talon Uno Las Pinas City 1700
T: +63 2 8833 6214
M: +63 920 902 7475
E: malibanga_ent@yahoo.com

AYOS MAESTRO CORP.

G/F WC Bldg., 2438 Belarmino St.
Brgy Bangkal, Makati City 1233
T: +63 2 7738 7406 / 8401 1934
M: +63 917 103 2451
E: ayosmaestro@gmail.com

KUMPONI MASTER INC.

20-A D. Tuazon corner Luskot Street
Don Manuel, Quezon City 1113
T: +63 2 7255-3932
M: +63 927 078 4408 / 917 173 6636
E: kumponimaster@gmail.com

ALTSTAR ENTERPRISES

1054 Reina Regente cor. Recto Avenue,
Binondo, Metro Manila 1006
M: +63 917 830 5576
E: howelltansy@gmail.com

FAR EASTERN HARDWARE & FURNITURE

38 Quezon St., Iloilo City 5000
T: +63 33 337 3808
E: feh_qzn@yahoo.com /
sales@fareastern.com.ph

NIPPON ENGINEERING WORKS

Ledesma corner Mabini Street,
Iloilo City 5000
T: +63 33 337 3232 / 508 1869 /
337 1122
E: nipponengineeringworks@gmail.com

BACOLOD INTEGRAL INC.

JL Bldg Luzuriaga St. Brgy 31,
Bacolod City, 6100
T: +63 34 433 8170 / 476 6561 /
434 2303
E: bacolodintegral@yahoo.com

REJOICE HARDWARE & ELEC'L SUPPLY

166 Hermie Bldg Cervantes St.
Dumaguete City 6200
T: +63 35 422 6762 / 225 4685 / 225 1836
E: rejoice_hardware@yahoo.com

N&N SERVICE CENTER

MCLL Hi-way (formerly Tetuan Hi-way)
Zamboanga City, 7016
T: +63 62 993 2190
M: +63 917 710 6193
E: nnservicecenter.c@gmail.com

FLERIC'S APPLIANCE SERVICE CENTER

B- Pilar Bldg., Port Area, Sabayle,
Poblacion, Iligan City, 9200
Lanao Del Norte
M: +63 968 615 3197

GOMEZ POWER TOOLS SALES & SERVICE CTR.

Rizal, Santiago City, Isabela,
Region 2, Cagayan Valley 3311
T: +63 78 839 55266
E: gomezpowertools@yahoo.com

CONSUMERS APPLIANCE SERVICE CENTER

National Highway, Purok 2, Bonfal
Proper Bayombong, Nueva Vizcaya 3700
T: +63 78 805 1880 M: +63 917 564 4800
E: conserv_2006@yahoo.com

DGS AIRCONDITIONING TRADING

Brgy. Zulueta, Maharlika Highway
Cabanatuan City, Nueva Ecija 3100
T: +63 44 806 1841
E: dgsaircontrading@gmail.com

CHARLESTON COMPUTER EXPRESS CENTER

476 Rizal Avenue corner P. Genato
Street, Brgy 21, Batangas City 4200
T: +63 43 980 2169
E: charlestonpcworx@gmail.com

OLIVAN HARDWARE DEPOT INC.

Behind Olivian Sea Oil Station,
Magsaysay Avenue, Naga City 4400
T: +63 54 472 2828
E: olivanhomedepotsales@gmail.com

NEW DARAGA DY ENTERPRISES INC.

Rizal Street, Daraga Albay 4501
T: +63 52 483 3613 / 483 3813
E: jen_sy_dy@yahoo.com

WASHINGTON ENTERPRISES

181-185 Rizal Ave.,
Tacloban City 6500
T: +63 53 321 2521
E: wephl@yahoo.com; washington.
enterprises.service@gmail.com

TOOLAID SERVICE CENTER

Unit D, Arcenas Bldg., MJ Cuenco Ave.
Brgy. T. Padilla, Cebu City 6000
T: +63 32 427 3375
M: +63 969 316 3888
E: support-cbu@toolaid.ph

TOOLAID SERVICE CENTER

Unit 2 & 3 Maroo Arcade Mantawi Drive,
William Seno Street Mandaue City 6014
T: +63 32 414 7909
M: +63 969 315 3888
E: support-mde@toolaid.ph

DMD ELECTRONICS

JVS Peak Bldg., Door 2 & 3 Roxas Blvd.,
Davao City 8000
T: +63 82 284 3114
E: dmd_electronics@yahoo.com

AC POWERTOOLS TRADING

#583 Jr Borja Extension
Camaman-an,
Cagayan de Oro City 9000
M: +63 966 419 6636
E: acpowertools2023@gmail.com

ROBERT BOSCH INC., 11/F West Campus, 20 Le Grand Ave., McKinley West, Fort Bonifacio, 1634 Taguig City
T: +63 2 8870 3888 | www.bosch-pt.com.ph

BOSCH CEBU HUB, Unit 2 & 3 Maroo Arcade, Mantawi Drive, William Seno St., Cebu City 6014
T: +63 32 414 7909 | E: toolaidservicecentermde@yahoo.com

BOSCH DAVAO HUB, Door 2 & 3 JV'S Peak Bldg., Roxas Blvd., Davao City 8000
T: +63 82 284 3114 | E: dmd_electronics@yahoo.com

